



Alfa Laval AquaStar

Domestic hot water unit for apartments

Alfa Laval AquaStar is a complete, installation-ready tap water unit. It is suitable for apartments and single family houses that are connected to a heating network.

Alfa Laval has long experience in district heating technology and has developed AquaStar with a well-considered function and simple operation. All components are readily accessible for maintenance and future servicing needs.

High comfort

AquaStar offers fully automatic temperature control for hot water. The hot water is heated by direct exchange with high capacity. This means that the hot water is always as fresh as the incoming cold water.

Simple installation

Small dimensions, low weight, and self-acting control equipment ensure simple installation.

AquaStar includes insulation to save energy.

Long-term security

AquaStar represents the very latest technology and meets very strict long-term performance specifications. The plates are made from acid-resistant, stainless steel. All components are mutually tuned and are subjected to detailed functional testing according to Alfa Laval's ISO 9001:2008 quality assurance system.

AquaStar is built in compliance with PED 97/23/EC.

Heating network – a good source of heat

A heating network is an efficient technology that meets the need for hot water in a simple, convenient and secure way.

Operation


AquaStar is used for the indirect connection of apartments and single family houses to the heating network.

A heat exchanger is used to transfer heat from the heating network medium to the hot water system. Heat is transferred through a package of thin, acid-resistant, stainless steel plates, which keeps the heating network medium separate from the domestic hot water system.

A self-sensing temperature regulator controls the hot water temperature. This measures the temperature of the hot water in the heat exchanger and automatically adjusts the outgoing flow. This patented, in-house Alfa Laval design gives a constant hot water temperature irrespective of volume and pressure flow.

AquaStar includes insulation for better energy efficiency.




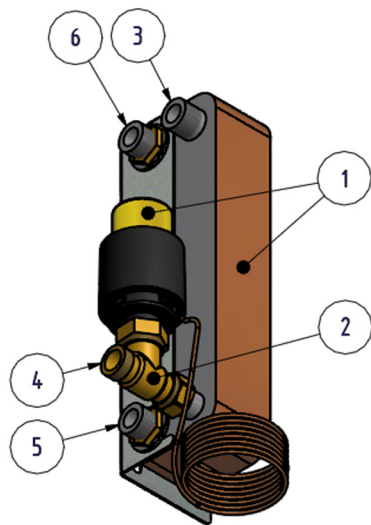

Components

1. Heat exchanger and temperature controller for hot water
2. Control valve for hot water
3. Heating network media, supply
4. Heating network media, return
5. Cold water (CW)
6. Hot water (HW)

Diagrammatic flow chart for AquaStar

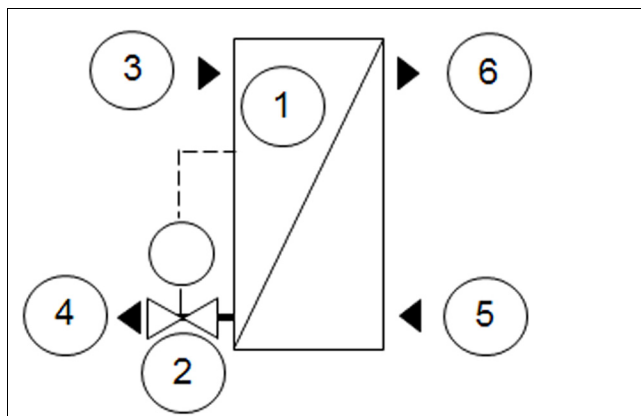

Operating data

	Heating medium	Hot water circuit
Design pressure, MPa	1.6	1.0
Design temperature, °C	120	100
Volume, l	0.34	0.36

Performance at available differential pressure 50-600 kPa

Designed temperature programme (°C)	Capacity (kW)	Primary flow (l/s)	Actual return temp. (°C)	Secondary flow (l/s)
Hot water circuit				
80-25/10-55	79	0.34	25	0.42
70-25/10-58	36	0.19	25	0.18
65-25/10-50	55	0.33	25	0.33

An easily manageable, economical and durable source of heat

The AquaStar uses the heating network medium for heating the domestic hot water.

The AquaStar is a wall-mounted unit and is very compact. The unit is discreet and to minimize transmission of operational sounds, we recommend installing it on well insulated walls or on walls of concrete.

AquaStar requires no attendance or maintenance and has a very long operational life. In the event of requiring service or component exchange at some future date, all parts are easily accessible and individually replaceable.

Other information

Electrical data: -----

Dimensions (with out cover): 200 mm width x 120 mm depth, 350 mm height

Weight: 5 kg

Transport particulars: Total weight 8 kg, 0,01 m³

Connections

	External thread
Heating network media supply	G ¾
Heating network media return	G ¾
Cold water	G ¾
Hot water	G ¾

How to contact Alfa Laval

Up-to-date AlfaLaval contact details for all countries are always available on our website on www.alfalaval.com