



## CXP – Shell-and-tube condenser for fresh and sea water

### A strong set of benefits



#### Application

The CXP fresh water condenser is available for process cooling and air conditioning applications using HFC refrigerants at medium pressure (PS 30 barg) and high pressure (PS 45 barg). The CXP is also available for refrigeration applications using sea water (CXPM version).

#### Technology

The design features high performance enhanced surface tubes which provide a better thermal efficiency improvement of +15% compared with previous CFC and CPS product lines. The CXP is optimized for HFC condensation and the new product line ensures a very compact design with reliable performance even at temperature approaches as low as 1.5 K.

#### Design features

- The CXP is available both as a standard catalogue product line and also as special customized designs to suit every need.
- The CXP can be used with a wide range of water conditions and refrigerants including R404A, R407C, R134a and R410A.
- A modular front header (water boxes) offers the option of two or four passes. This feature is suitable for distributors who can keep a stock of only one item.

#### Quotation guidelines


- Thermal sizing: SmarTube calculation software.
- Pricing: RCPL (Recommended Customer Price List).
- Product information brochure is available.

**Basic features**

- Condensing capacity: 15-150 kW (50-500 kBtu/h)
- 2 and 4 water passes
- Shell diameters, ØD: 114, 141, 168 mm (4, 5, 6 in)
- Total length, L: 973-1906 mm (3.2-6.3 feet)


**Material components**

	<b>Fresh water</b>	<b>Sea water</b>
Tubes	Copper	CuNi 90-10
Tube sheet	Carbon steel	St. Steel 316L
Tube supports	Polymeric	Polymeric
Shell	Carbon steel	Carbon steel
Anodes		Carbon steel

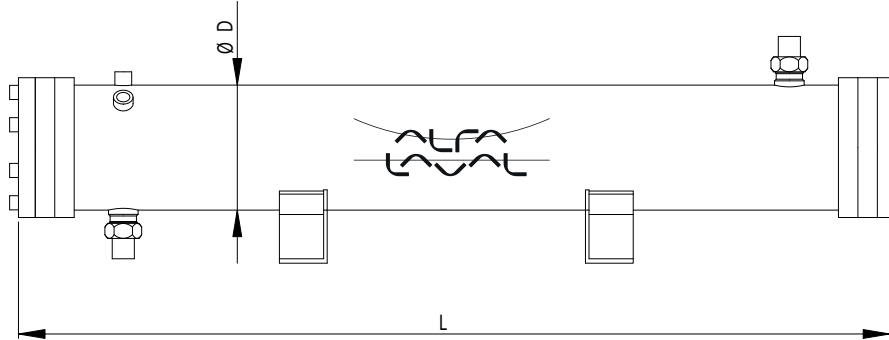

**Working principle condenser mode**

- The refrigerant condenses on the outside of the tubes
- The water flows inside the tubes

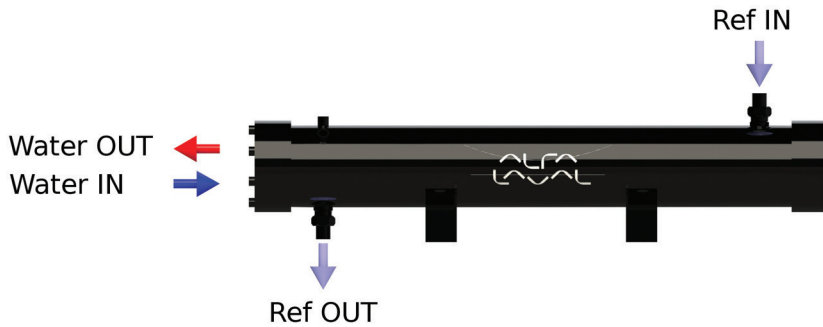

**PED (CE) approval**

Version	Tube side				Shell side			
	PS (barg)	TS (°C)	TP (barg)	TP (barg)	PS (barg)	TS (°C)	TP (barg)	TP (barg)
<b>STD</b>	10	-10	120	15.4	30	-10	120	43.6
<b>HP</b>	16	-10	120	24.6	45	-10	120	65.4

ASME approval available on request

- STD: Standard
- HP: High pressure - special on demand
- PS: Pressure service
- TS: Temperature service
- TP: Test pressure

**Available on request**

- Mounting feet
- Refrigerant operating level sight glass

ERC00471EN 1212

Alfa Laval reserves the right to change specifications without prior notification.

**How to contact Alfa Laval**

Up-to-date AlfaLaval contact details for all countries are always available on our website on [www.alfalaval.com](http://www.alfalaval.com)