



### PERFORMANCE RANGE

- Flow rate up to **900 l/min** (54 m<sup>3</sup>/h)
- Head up to **110 m**

### APPLICATION LIMITS

- Manometric suction lift up to **7 m**
- Liquid temperature between **-10 °C** and **+90 °C**
- Ambient temperature between **-10 °C** and **+40 °C**
- Max. working pressure **10 bar**
- Continuous service **S1**

### CONSTRUCTION AND SAFETY STANDARDS

EN 60034-1  
IEC 60034-1  
CEI 2-3



### CERTIFICATIONS

COMPANY WITH MANAGEMENT SYSTEM  
CERTIFIED BY DNV  
ISO 9001: QUALITY  
ISO 14001: ENVIRONMENT AND SAFETY

### INSTALLATION AND USE

Suitable for use with clean water and liquids that are not chemically aggressive towards the materials from which the pump is made. As a result of their reliability and the fact that they are easy to use, these pumps are widely used in civil, agricultural and industrial applications such as for supplying water, in conditioning and cooling systems, for irrigation, etc. The pump should be installed in an enclosed environment, or at least sheltered from inclement weather.

### PATENTS - TRADE MARKS - MODELS

- Modello comunitario registrato n° 002098434 per CP 160, CP210
- Registered Italian model n° 72753 for CP 680, CP 700, CP 750

### OPTIONALS AVAILABLE ON REQUEST


- Special mechanical seal
- EN 10088-3 - 1.4401 (AISI 316) stainless steel motor shaft for CP 680, CP 700, CP 750
- Other voltages
- IP X5 class protection for CP 160

### GUARANTEE

2 years subject to terms and conditions

**PERFORMANCE RANGE**


**60 Hz n= 3450 1/min HS= 0 m**

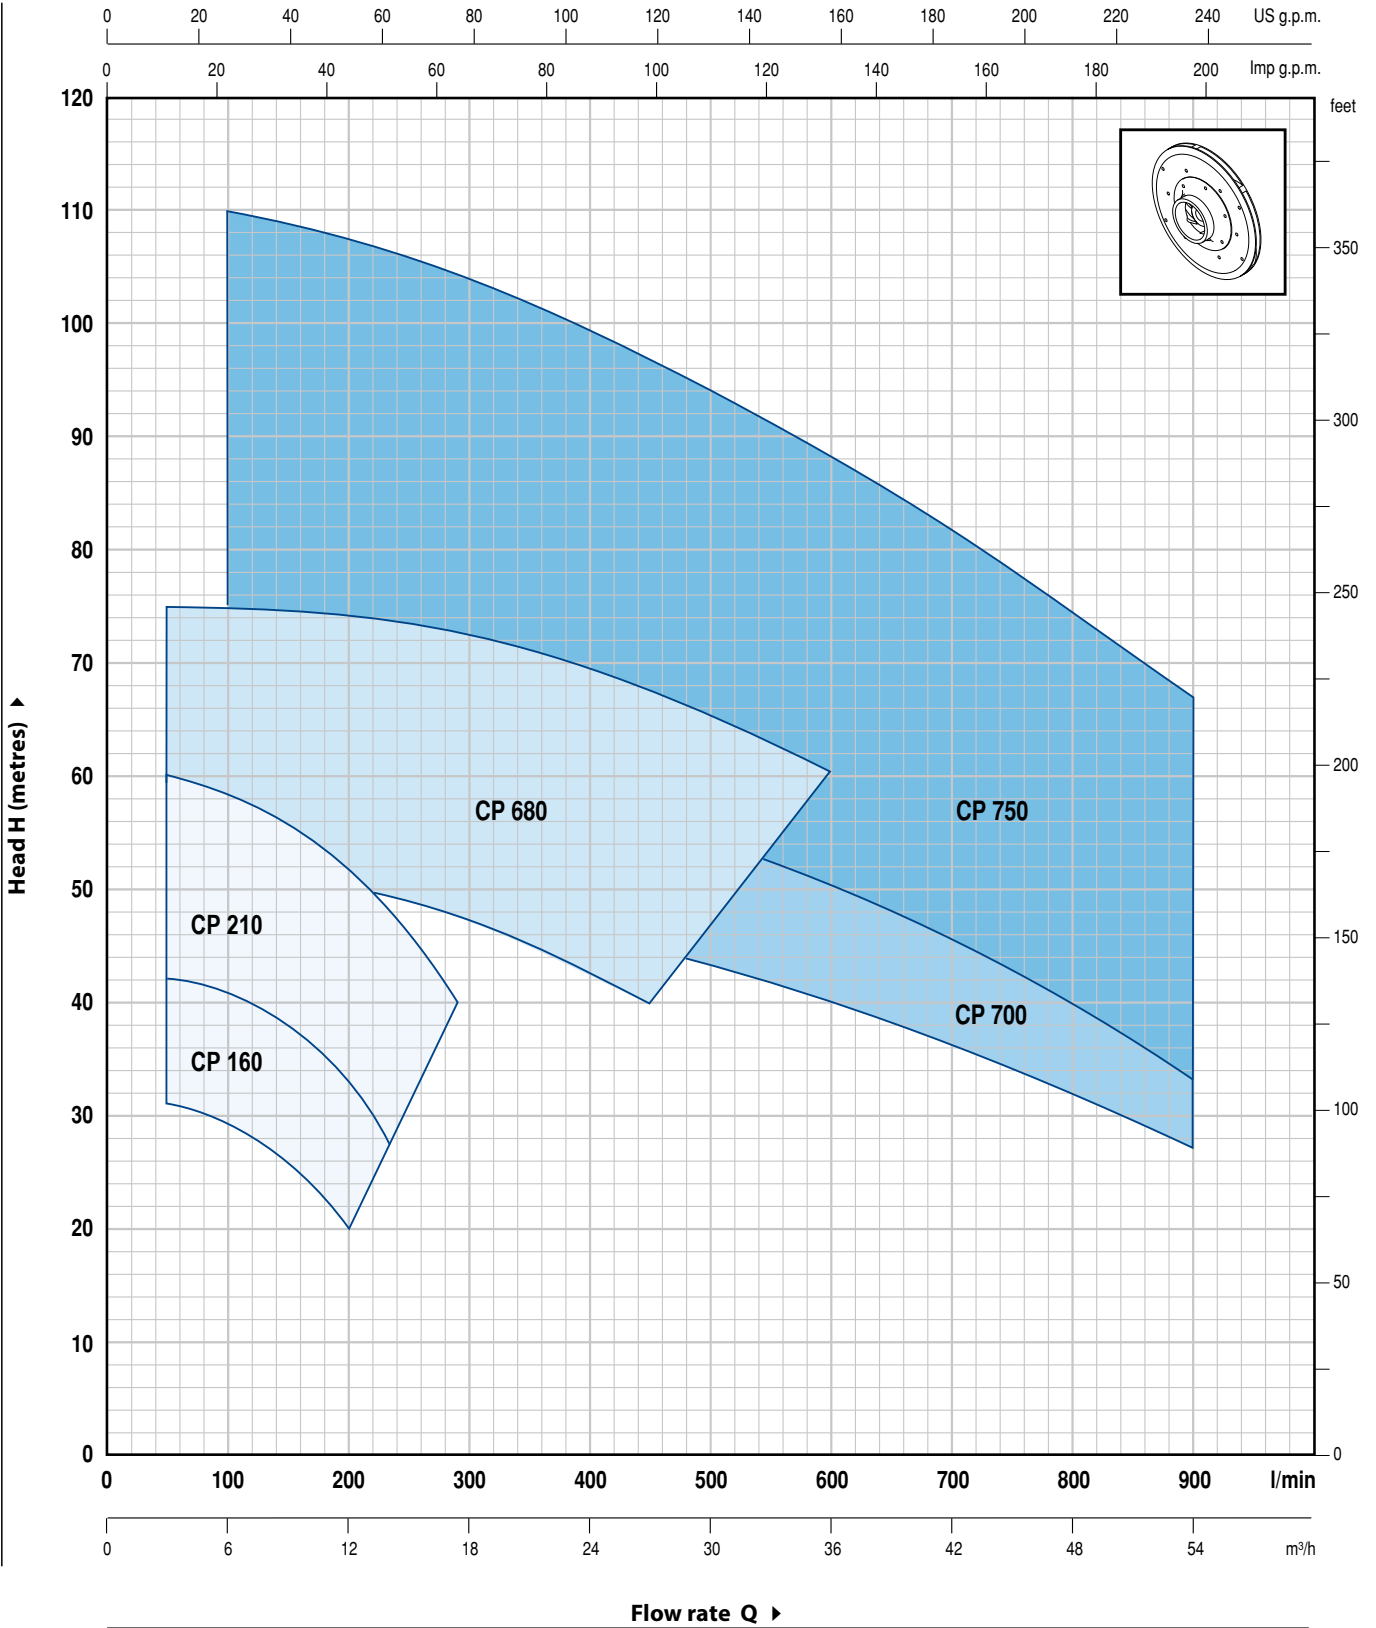

# CP 160-210

## CHARACTERISTIC CURVES AND PERFORMANCE DATA

60 Hz n= 3450 1/min HS= 0 m

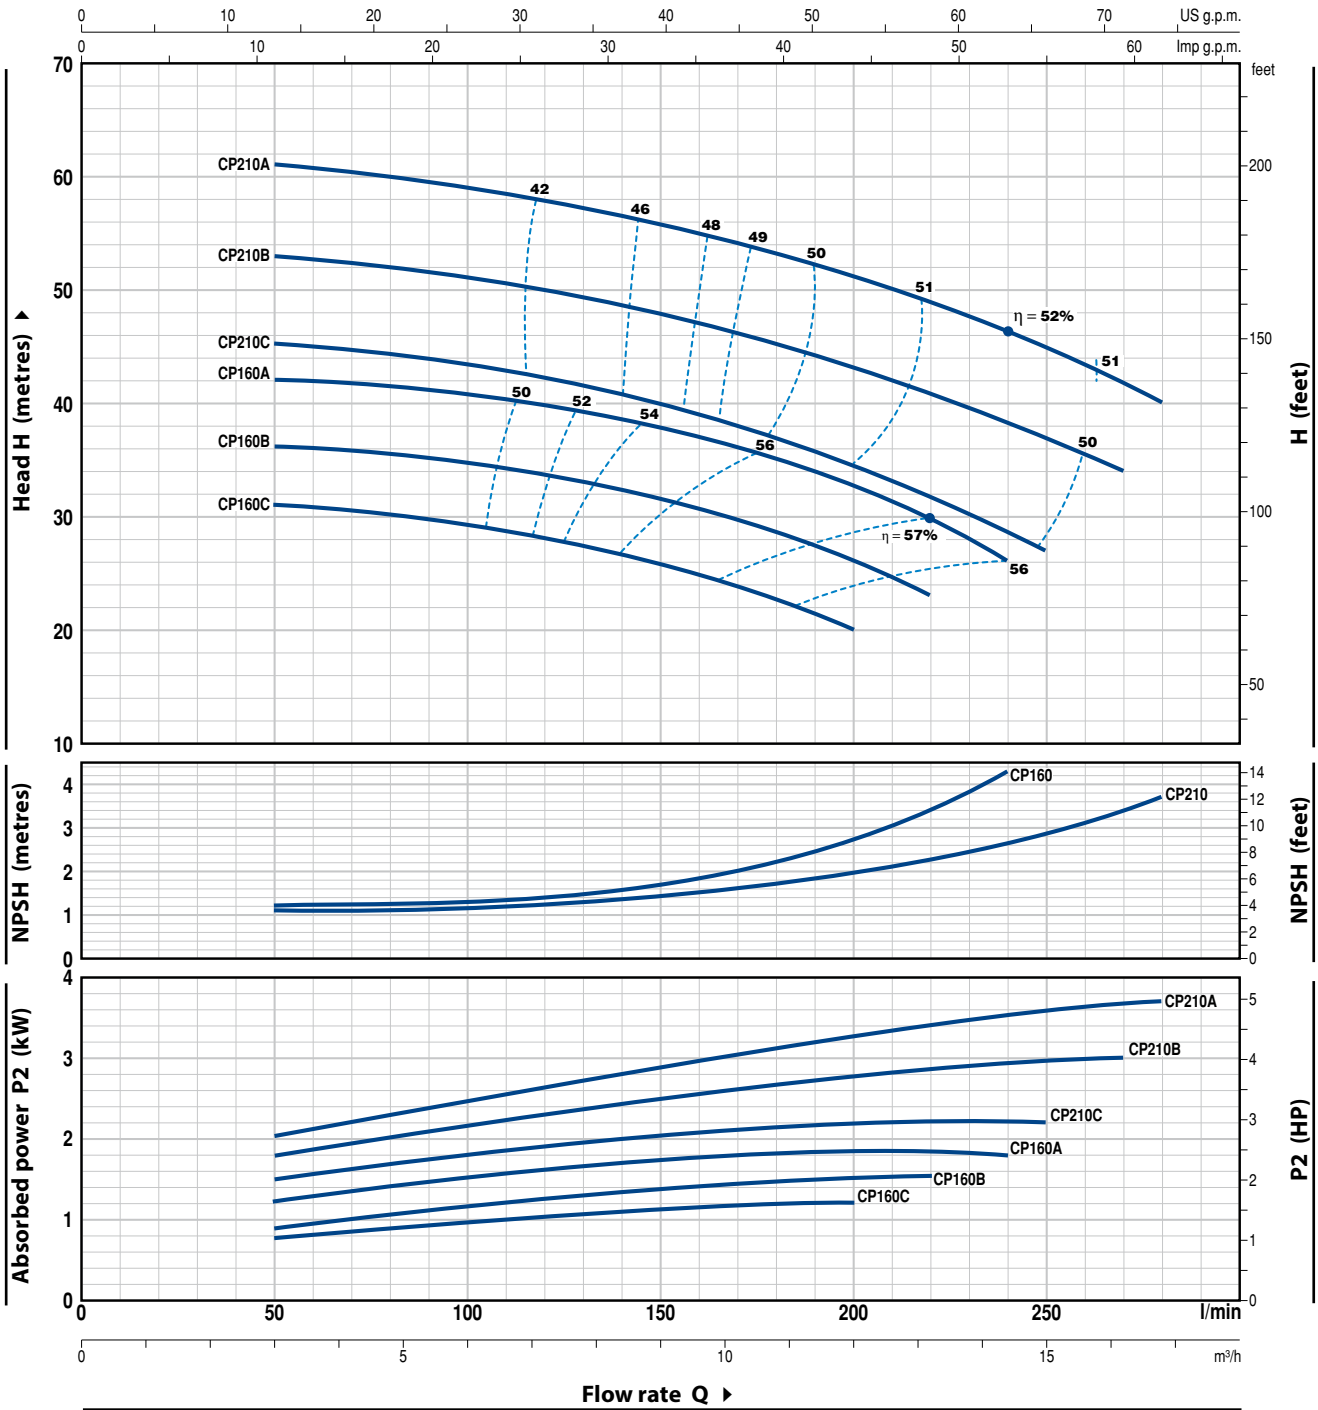


MODEL		POWER		Q	Flow rate															
Single-phase	Three-phase	kW	HP		m <sup>3</sup> /h	0	3	4.5	6	7.5	9	10.5	12	13.2	14.4	15	16.2	16.8		
				l/min	0	50	75	100	125	150	175	200	220	240	250	270	280			
CPm 160C	CP 160C	1.1	1.5	H metres	32	31	30.5	29.5	28	26	23	20								
CPm 160B	CP 160B	1.5	2		37	36	35.5	34.5	33.5	31.5	29	26.5	23							
-	CP 160A	2.2	3		43	42	41.5	40.5	39.5	38	35.5	33	30	26						
CPm 210C	CP 210C	2.2	3		46	45.5	44.5	43.5	42	40	37.5	34.5	32	28.5	27					
-	CP 210B	3	4		54	53	52	51	49.5	48	45.5	43	40	38.5	37	34				
-	CP 210A	4	5.5		61	61	60	59	57.5	56	53.5	51	49	46.5	45	42	40			

Q = Flow rate H = Total manometric head HS = Suction height

Tolerance of characteristic curves in compliance with EN ISO 9906 Grade 3.

## CHARACTERISTIC CURVES AND PERFORMANCE DATA

60 Hz n= 3450 1/min HS= 0 m

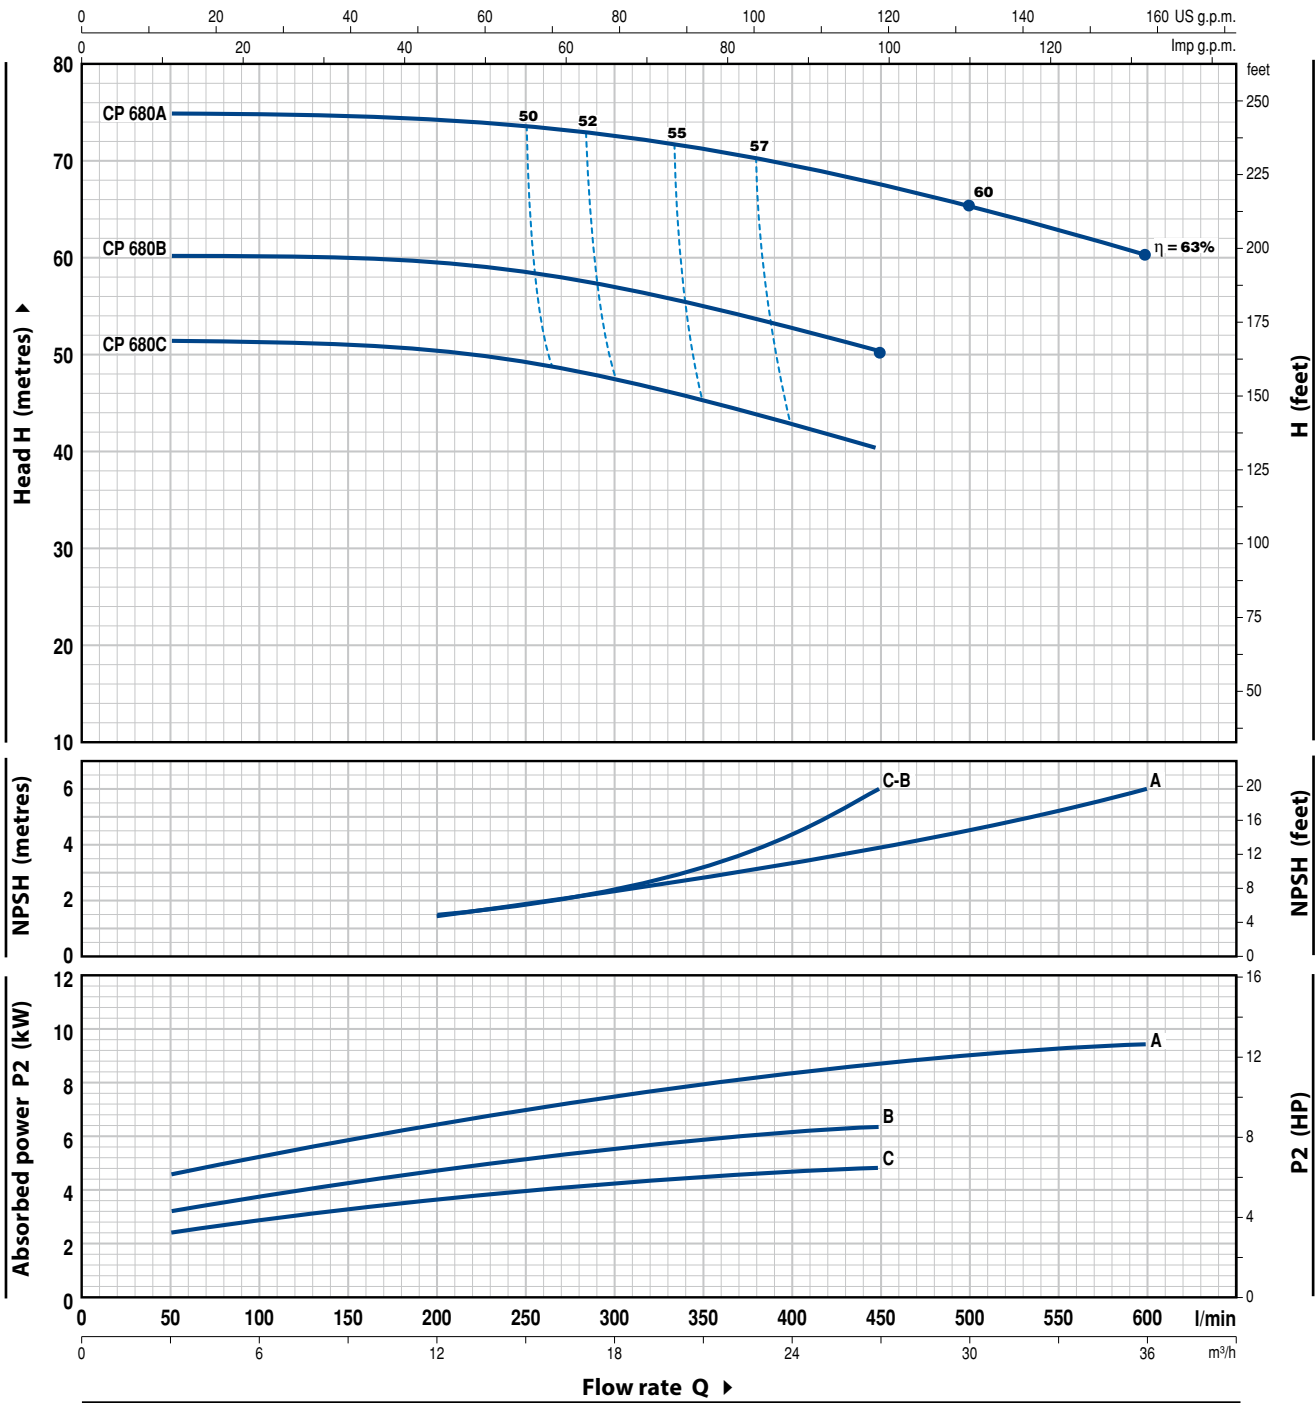

MODEL		POWER		Q	Flow rate															
Single-phase	Three-phase	kW	HP		m <sup>3</sup> /h	0	3	6	9	12	15	18	21	24	27	30	33	36		
				l/min	0	50	100	150	200	250	300	350	400	450	500	550	600			
CPm 680C	CP 680C	4	5.5	H metres	52	51.5	51	50.8	50.3	49	47.5	45	43	40						
-	CP 680B	5.5	7.5		61	60.5	60	59.5	59	58.5	57	55	52.5	50						
-	CP 680A	7.5	10		75	75	74.5	74.3	74	73.5	72.5	71	68.5	67.3	65	62.8	60			


Q = Flow rate H = Total manometric head HS = Suction height

Tolerance of characteristic curves in compliance with EN ISO 9906 Grade 3.

# CP 700

## CHARACTERISTIC CURVES AND PERFORMANCE DATA

60 Hz n= 3450 1/min HS= 0 m

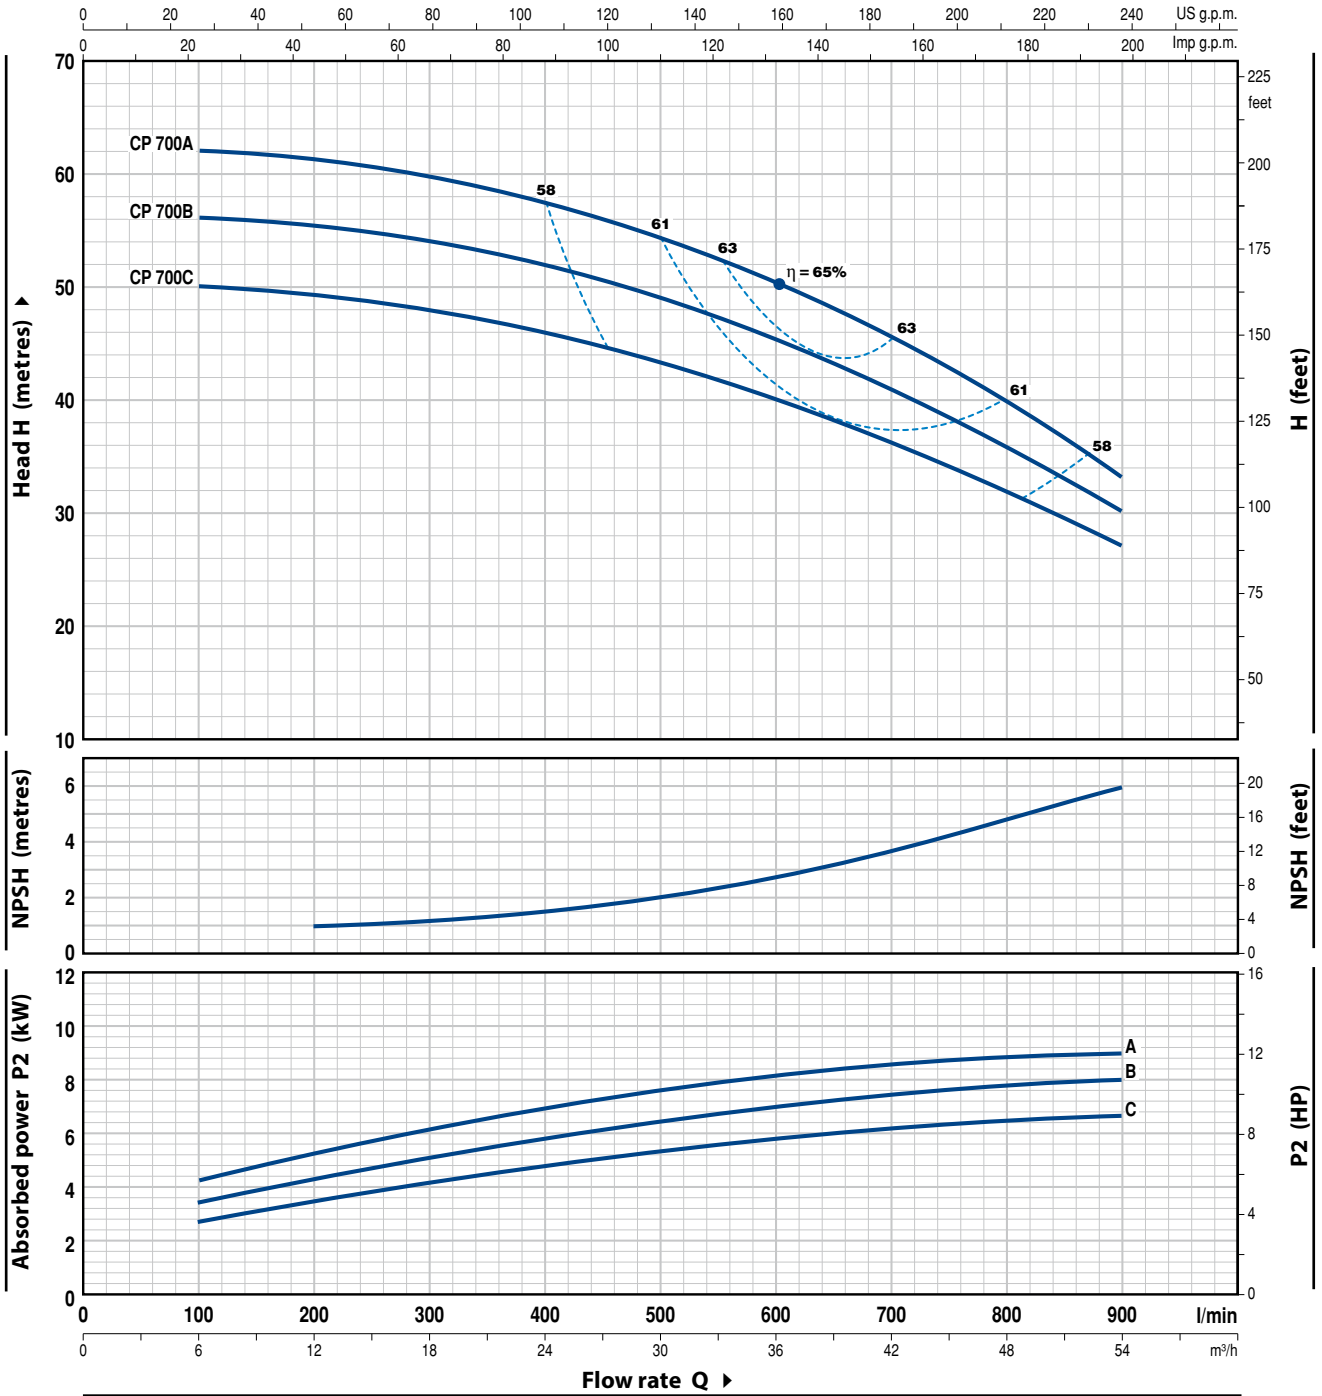


MODEL	POWER		Q	Flow rate											
	kW	HP		0	6	12	18	24	30	36	42	48	54		
Three-phase				0	100	200	300	400	500	600	700	800	900		
CP 700C	5.5	7.5	H metres	51	50	49.5	48	46	43.5	40	36.5	32	27		
CP 700B	7.5	10		56	56	55.5	54	52	49	45.5	41	36	30		
CP 700A	9	12.5		62	62	61.5	60	57.5	54.5	50.5	45.5	39.5	33		

Q = Flow rate H = Total manometric head HS = Suction height

Tolerance of characteristic curves in compliance with EN ISO 9906 Grade 3.

## CHARACTERISTIC CURVES AND PERFORMANCE DATA

60 Hz n= 3450 1/min HS= 0 m

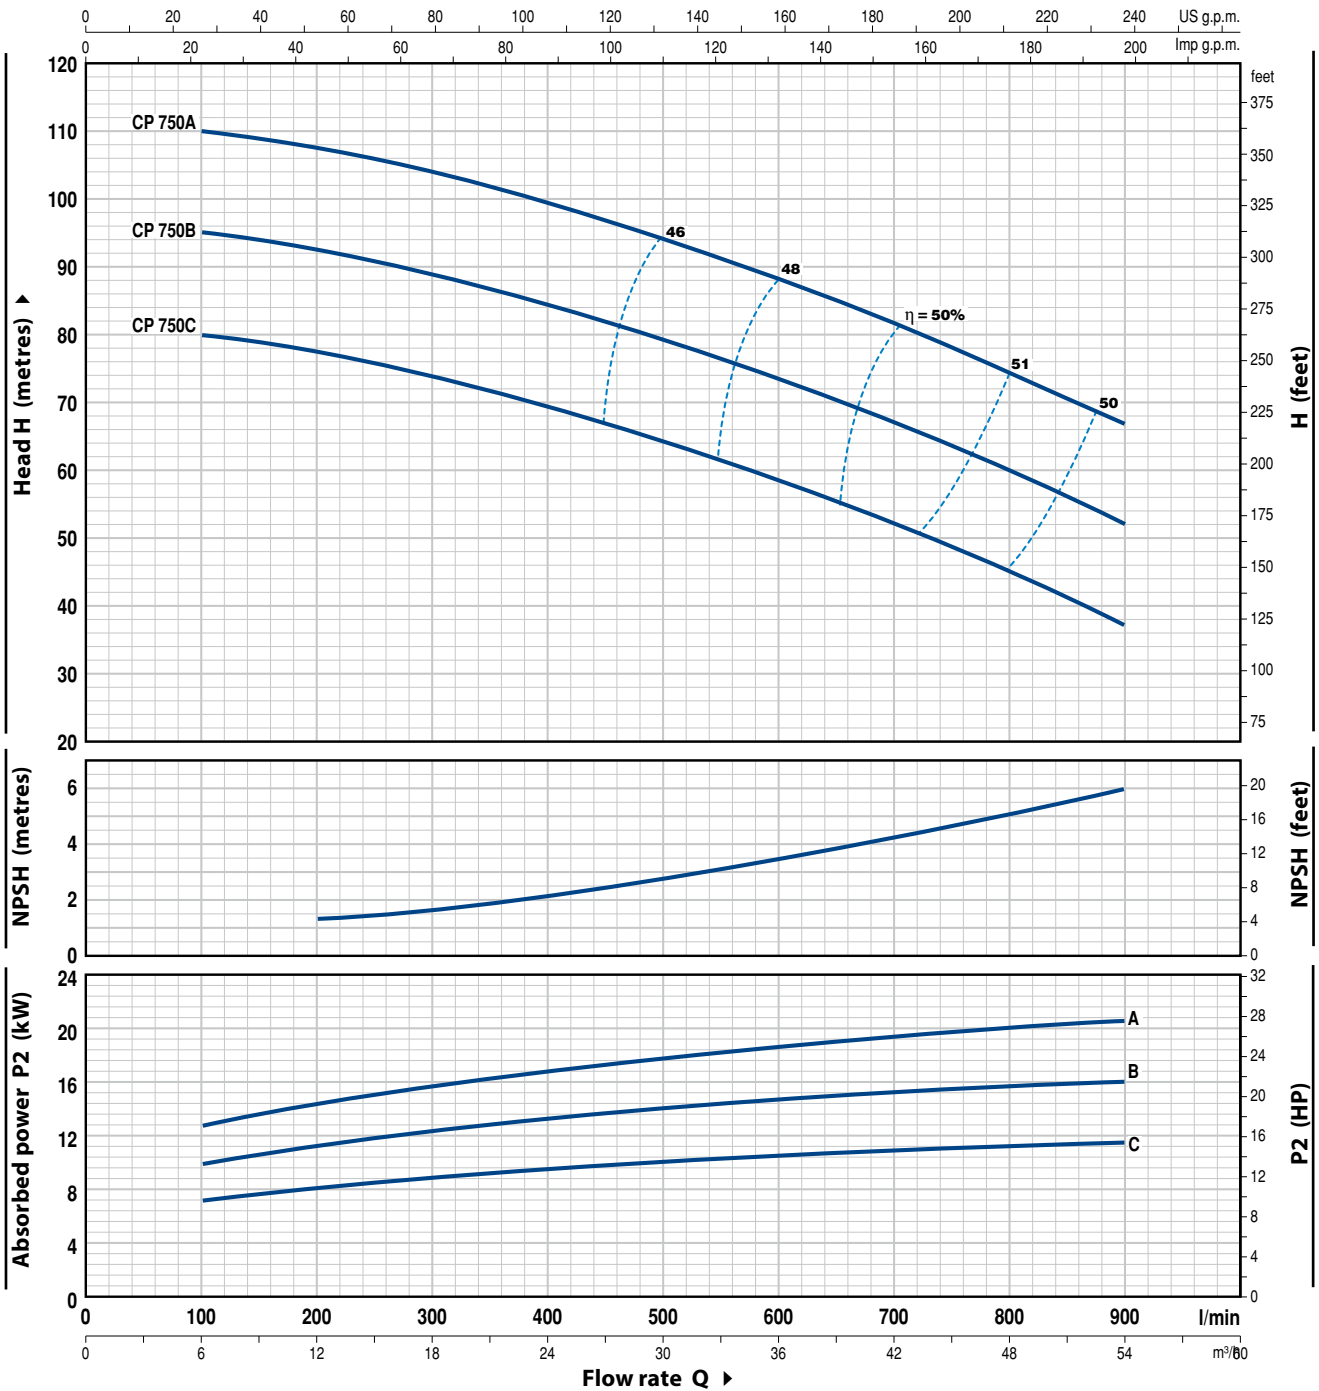


MODEL	POWER		Q	Flow rate												
	kW	HP		m <sup>3</sup> /h	0	6	12	18	24	30	36	42	48	54		
Three-phase			l/min	0	100	200	300	400	500	600	700	800	900			
CP 750C	11	15	H metres	80	80	78	74	69	64	58	52	45	37			
CP 750B	15	20		95	95	93	89	84	79	73	67	60	52			
CP 750A	18.5	25		110	110	108	104	99	94	88	82	75	67			

Q = Flow rate H = Total manometric head HS = Suction height


Tolerance of characteristic curves in compliance with EN ISO 9906 Grade 3.

# CP 160-210

POS.	COMPONENT	CONSTRUCTION CHARACTERISTICS					
1	PUMP BODY	Cast iron, complete with threaded ports in compliance with ISO 228/1					
2	BODY BACKPLATE	Cast iron					
3	IMPELLER	Brass					
4	MOTOR SHAFT	Stainless steel EN 10088-3 - 1.4104					
5	MECHANICAL SEAL	<b>Pump</b>	<b>Seal</b>	<b>Shaft</b>	<b>Materials</b>		
		<i>Model</i>	<i>Model</i>	<i>Diameter</i>	<i>Stationary ring</i>	<i>Rotational ring</i>	<i>Elastomer</i>
		CP 160	FN-18	Ø 18 mm	Graphite	Ceramic	NBR
CP 210	FN-24	Ø 24 mm	Graphite	Ceramic	NBR		
6	BEARINGS	<b>Pump</b>	<b>Model</b>				
		CP 160	6204 ZZ / 6204 ZZ				
		CP 210	6206 ZZ - C3 / 6205 ZZ				
7	CAPACITOR	<b>Pump</b>	<b>Capacitance</b>				
		<i>Single-phase</i>	<i>(220 V)</i>	<i>(110 V or 127 V)</i>			
		CPm 160C	31.5 µF 450 VL	60 µF 250 VL			
		CPm 160B	45 µF 450 VL	80 µF 250 VL			
		CPm 210C	70 µF 450 VL	-			
8	ELECTRIC MOTOR	<p>CPm: single-phase 220 V - 60 Hz with thermal overload protector built-in to the winding (up to 1.5 kW).            CP: three-phase 220/380 V - 60 Hz or 220/440 V - 60 Hz.</p> <p>⇒ Pumps fitted with the three-phase motor option offer IE2 (IEC 60034-30) class high performance</p> <p>- Insulation: F class.            - Protection: IP X4.</p>					

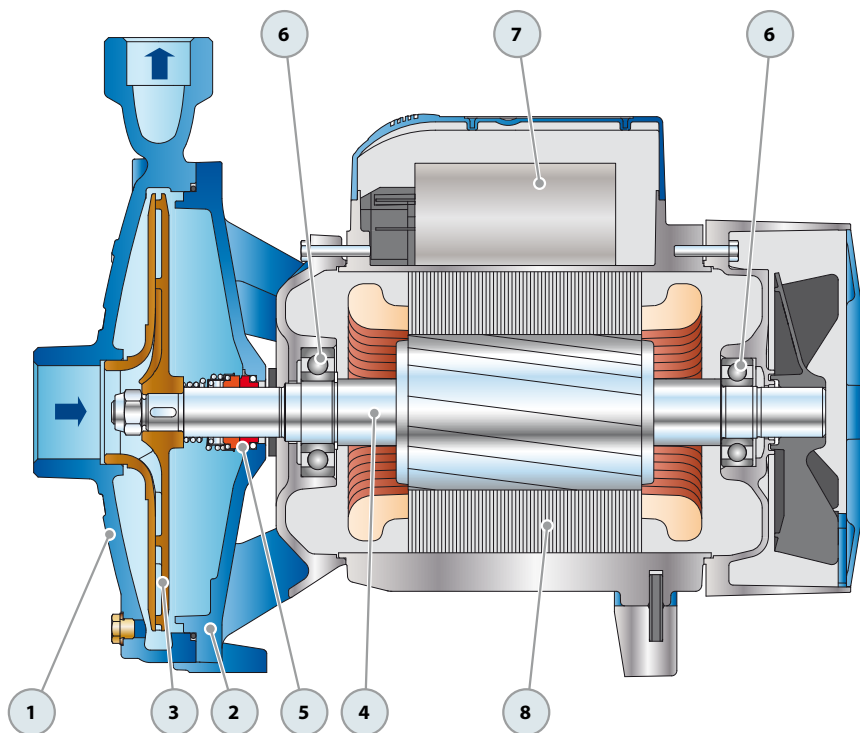

## DIMENSIONS AND WEIGHT

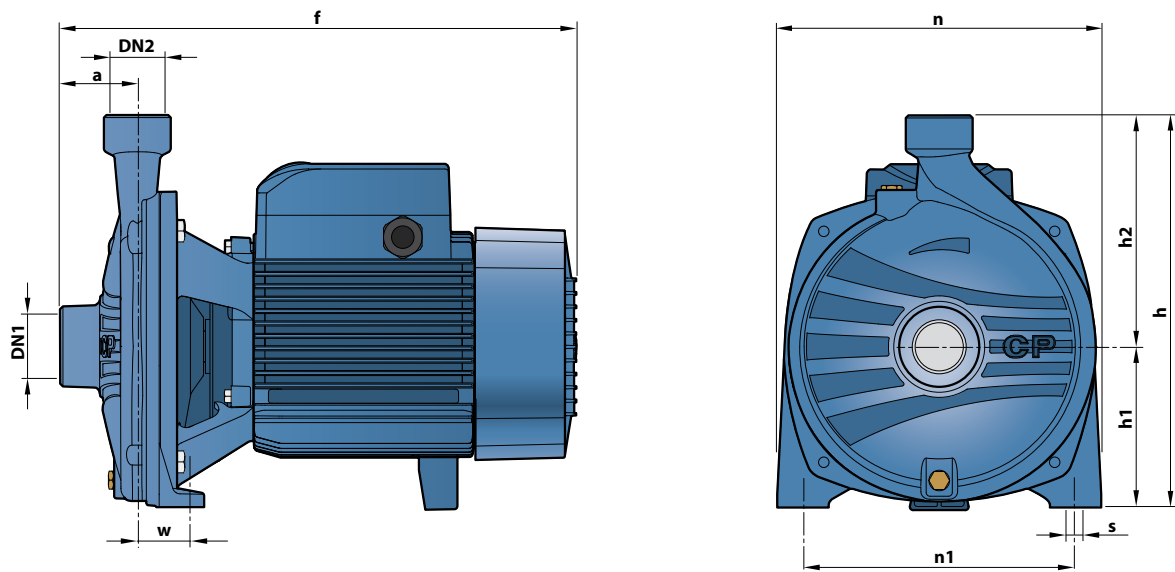

MODEL		PORTS		DIMENSIONS mm									kg	
Single-phase	Three-phase	DN1	DN2	a	f	h	h1	h2	n	n1	w	s	1~	3~
CPm 160C	CP 160C	1½"	1"	54	373	260	110	150	207	165	44.5	11	19.7	17.7
CPm 160B	CP 160B												21.0	21.0
-	CP 160A												-	21.0
CPm 210C	CP 210C			60	402	305	125	180	252	210	39.5	11	26.0	27.5
-	CP 210B												-	30.0
-	CP 210A												-	32.0


## ABSORPTION

MODEL	VOLTAGE (single-phase)		
	220 V	110 V	127 V
Single-phase	220 V	110 V	127 V
CPm 160C	9.0 A	18.0 A	16.0 A
CPm 160B	10.5 A	21.0 A	20.0 A
CPm 210C	15.0 A	-	-

MODEL	VOLTAGE (three-phase)				
	220 V	380 V	660 V	220 V	440 V
Three-phase	220 V	380 V	660 V	220 V	440 V
CP 160C	6.1 A	3.5 A	2.0 A	5.5 A	3.0 A
CP 160B	6.9 A	4.0 A	2.3 A	6.9 A	3.7 A
CP 160A	9.5 A	5.5 A	3.1 A	9.2 A	4.9 A
CP 210C	9.0 A	5.1 A	3.0 A	8.6 A	4.8 A
CP 210B	13.0 A	7.5 A	4.3 A	11.5 A	6.0 A
CP 210A	18.2 A	10.5 A	6.1 A	13.5 A	7.3 A

## PALLETIZATION


MODEL		GROUPAGE			CONTAINER				
Single-phase	Three-phase	n° pumps	H (mm)	kg	n° pumps	H (mm)	kg		
				1~	3~		1~	3~	
CPm 160C	CP 160C	50	1555	1009	909	70	2121	1403	1263
CPm 160B	CP 160B	50	1555	1074	1074	70	2121	1494	1494
-	CP 160A	50	1555	-	1074	70	2121	-	1494
CPm 210C	CP 210C	18	1205	492	520	-	-	-	-
-	CP 210B	18	1205	-	564	-	-	-	-
-	CP 210A	18	1205	-	600	-	-	-	-

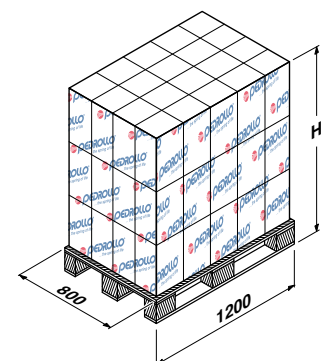




# CP 680-700-750

POS.	COMPONENT	CONSTRUCTION CHARACTERISTICS					
1	PUMP BODY	Cast iron with NPT ANSI B 1.20.1 threaded ports					
2	BODY BACKPLATE	Cast iron					
3	IMPELLER	Brass for CP 680, CP 700 Cast iron for CP 750					
4	MOTOR SHAFT	Stainless steel EN 10088-3 - 1.4104					
5	MECHANICAL SEAL	<i>Pump</i>	<i>Seal</i>	<i>Shaft</i>		<i>Materials</i>	
		<i>Model</i>	<i>Model</i>	<i>Diameter</i>	<i>Stationary ring</i>	<i>Rotational ring</i>	<i>Elastomer</i>
		CP 680	FN-24	Ø 24 mm	Graphite	Ceramic	NBR
		CP 700					
CP 750	FN-32 NU	Ø 32 mm	Graphite	Ceramic	NBR		
6	BEARINGS	<i>Pump</i>	<i>Model</i>				
		CP 680	6307 ZZ - C3 / 6206 ZZ - C3				
		CP 700	6310 ZZ - C3 / 6308 ZZ - C3				
		CP 750	6310 ZZ - C3 / 6308 ZZ - C3				
7	CAPACITOR	<i>Pump</i>	<i>Capacitance</i>				
		<i>Single-phase</i>	(220 V)				
		CPm 680C	70 µF 450 VL				
8	ELECTRIC MOTOR	CPm: single-phase 220 V - 60 Hz. CP: three-phase 220/380 V - 60 Hz or 220/440 V - 60 Hz. ➔ Pumps fitted with the three-phase motor option offer IE2 (IEC 60034-30) class high performance – Insulation: F class. – Protection: IP X5.					

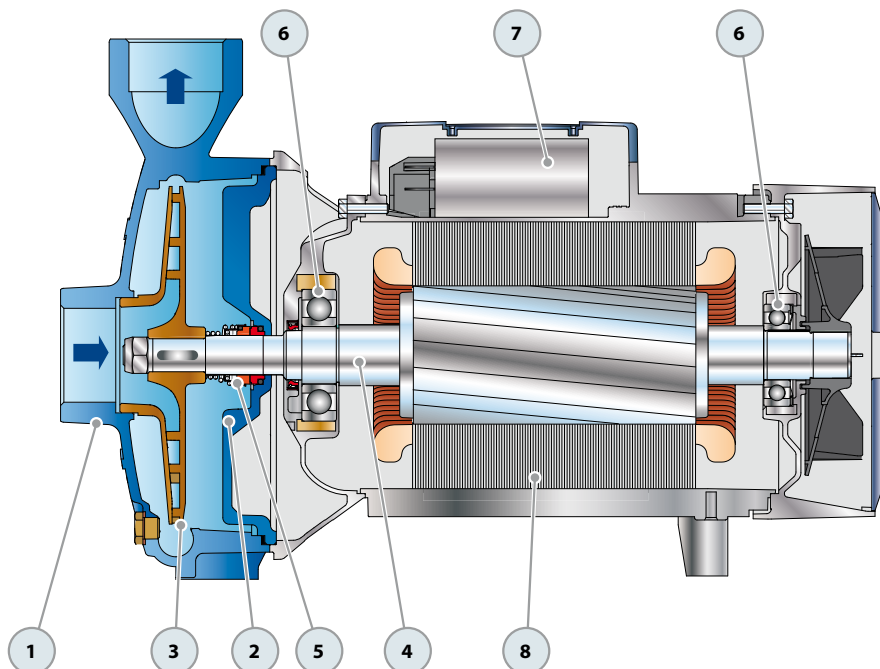

## DIMENSIONS AND WEIGHT

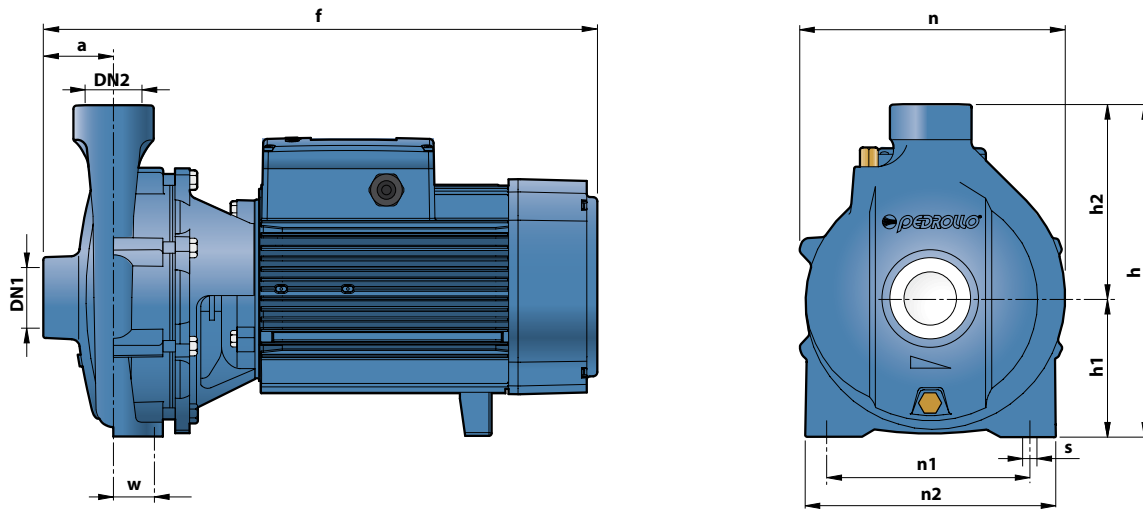

MODEL		PORTS		DIMENSIONS mm										kg	
Single-phase	Three-phase	DN1	DN2	a	f	h	h1	h2	n	n1	n2	w	s	1~	3~
CPm 680C	CP 680C	2"	2"	70	505/460	328	136	192	273	190	250	40	14	47.0	42.0
-	CP 680B				-									47.0	
-	CP 680A				-									51.0	
-	CP 700C				-									47.0	
-	CP 700B			-	51.0										
-	CP 700A			-	51.5										
-	CP 750C			65	571	392	160	232	322	230	294	45	14	-	103.0
-	CP 750B				666									-	120.0
-	CP 750A				-									135.6	

## ABSORPTION

MODEL	VOLTAGE (single-phase)
Single-phase	220 V
CPm 680C	26.5 A

MODEL	VOLTAGE (three-phase)				
Three-phase	220 V	380 V	660 V	220 V	440 V
CP 680C	20.5 A	12.0 A	6.9 A	19.3 A	11.7 A
CP 680B	25.1 A	14.5 A	8.4 A	22.5 A	13.5 A
CP 680A	34.6 A	20.0 A	11.6 A	29.4 A	22.0 A
CP 700C	27.7 A	16.0 A	9.2 A	24.3 A	16.0 A
CP 700B	33.8 A	19.5 A	11.3 A	29.4 A	22.0 A
CP 700A	34.7 A	20.0 A	11.6 A	30.8 A	22.3 A
CP 750C	50.0 A	28.0 A	16.2 A	48.0 A	25.0 A
CP 750B	59.0 A	34.0 A	19.7 A	60.0 A	30.0 A
CP 750A	70.0 A	40.5 A	23.4 A	75.0 A	38.0 A

## PALLETIZATION

MODEL		GROUPAGE			CONTAINER				
Single-phase	Three-phase	n° pumps	H (mm)	kg	n° pumps	H (mm)	kg		
				1~	3~			1~	3~
CPm 680C	CP 680C	12/18	1430	581	773	16/24	1860	769	1025
-	CP 680B	12	1430	-	581	16	1860	-	769
-	CP 680A	12	1430	-	629	16	1860	-	833
-	CP 700C	12	1430	-	581	16	1860	-	769
-	CP 700B	12	1430	-	629	16	1860	-	833
-	CP 700A	12	1430	-	635	16	1860	-	841
-	CP 750C	6	1180	-	635	-	-	-	-
-	CP 750B	6	1180	-	737	-	-	-	-
-	CP 750A	6	1180	-	831	-	-	-	-

