

Self-priming "JET" pumps

 Clean water

 Domestic use

 Civil use



PERFORMANCE RANGE

- Flow rate up to **70 l/min** (4.2 m³/h)
- Head up to **64 m**

APPLICATION LIMITS

- Manometric suction lift up to **9 m** (HS)
- Liquid temperature between **-10 °C** and **+40 °C**
- Ambient temperature up to **+40 °C**
- Max. working pressure **6 bar**
- Continuous service **S1**

CONSTRUCTION AND SAFETY STANDARDS

EN 60335-1
IEC 60335-1
CEI 61-150

EN 60034-1
IEC 60034-1
CEI 2-3



CERTIFICATIONS

Company with management system certified DNV
ISO 9001: QUALITY
ISO 14001: ENVIRONMENT

INSTALLATION AND USE

Suitable for use with clean water and liquids that are not chemically aggressive towards the materials from which the pump is made. The self-priming **JSW** pumps are designed to pump water even in cases where air is present. Because of their reliability and the fact that they are easy to use, they are recommended for use in domestic applications such as the distribution of water in combination with small or medium sized pressure tanks, and for the irrigation of gardens and orchards, etc. The pump should be installed in an enclosed environment or sheltered from inclement weather.

PATENTS - TRADE MARKS - MODELS

- Registered Trade Mark n. 013073135 JSW[®]
- Registered EU Design n. 002218610-0002
- European Patent n. 1 510 696

OPTIONS AVAILABLE ON REQUEST


- Pump body with NPT ANSI B 1.20.1 threaded ports
- Other voltages
- Pumps with technopolymer impeller

GUARANTEE

2 years subject to terms and conditions

CHARACTERISTIC CURVES AND PERFORMANCE DATA

60 Hz n= 3450 rpm HS= 0 m



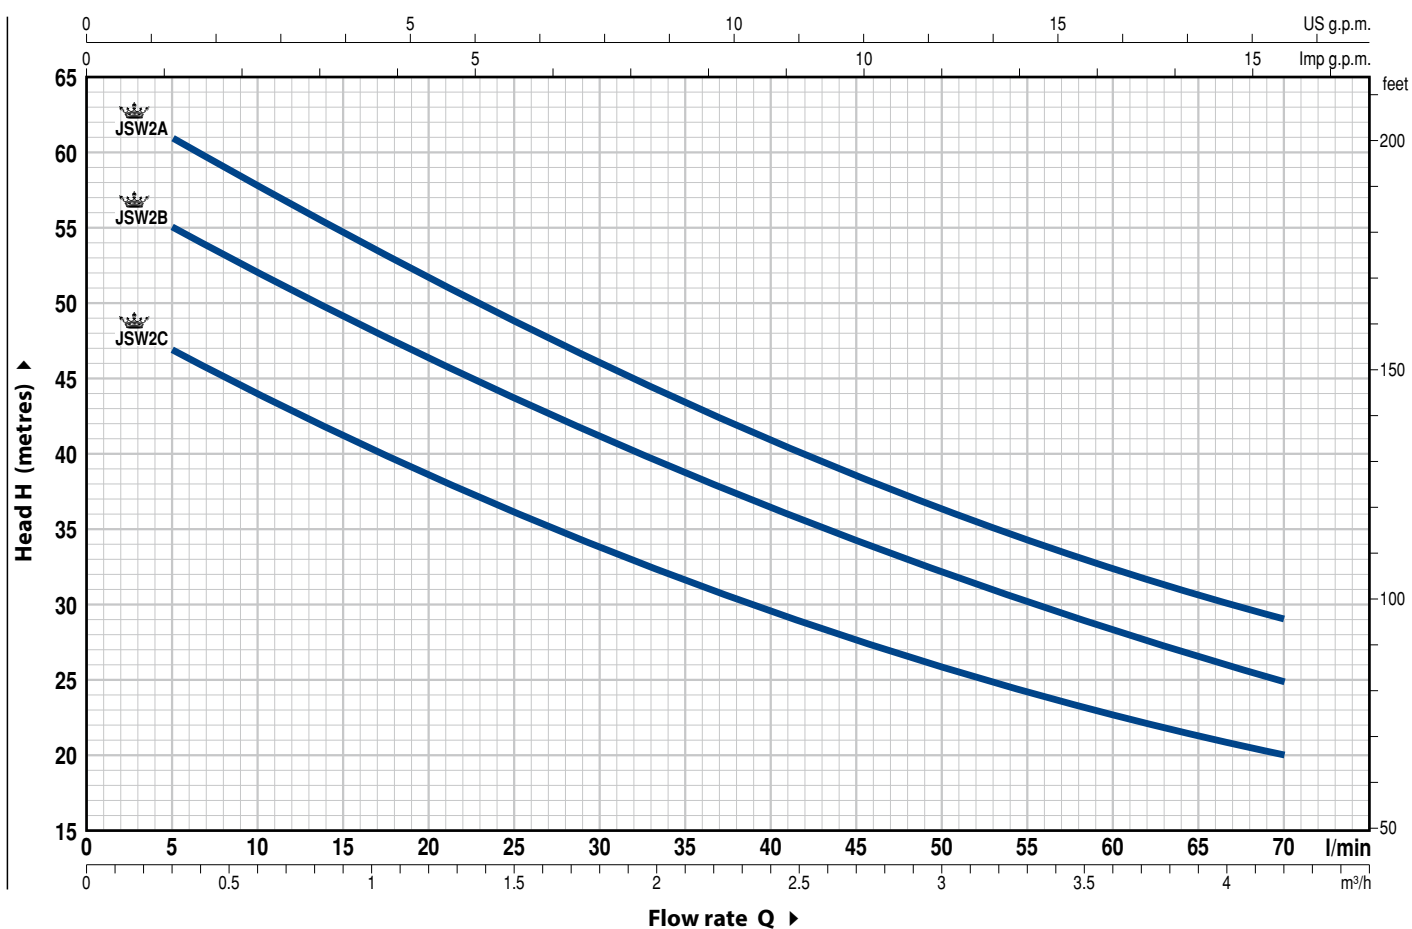


MODEL		POWER (P ₂)		Q												
Single-phase	Three-phase	kW	HP		m³/h	0	0.3	0.6	1.2	1.5	1.8	2.4	2.7	3.0	3.6	4.2
					l/min	0	5	10	20	25	30	40	45	50	60	70
JSWm 2C	JSW 2C	0.75	1	H metres		50	47	44	38.5	36	34	29.5	27.5	26	22.5	20
JSWm 2B	JSW 2B	0.90	1.25			58	55	52	46.5	43.5	41	36.5	34	32	28	25
JSWm 2A	JSW 2A	1.1	1.5			64	61	57.5	51.5	49	46	41	38.5	36	32	29


Q = Flow rate H = Total manometric head HS = Suction height

Tolerance of characteristic curves in compliance with EN ISO 9906 Grade 3B.


STANDARD INSTALLATION

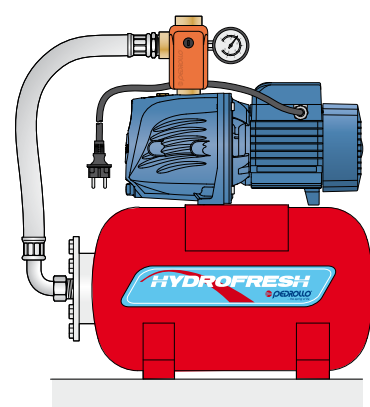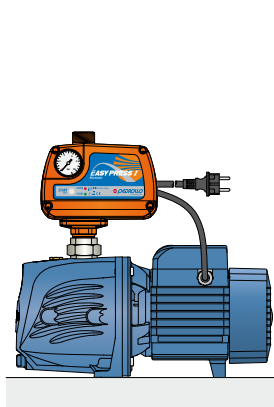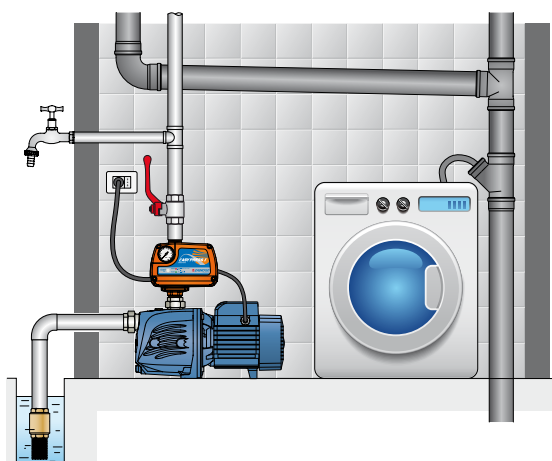

POS. COMPONENT		CONSTRUCTION CHARACTERISTICS				
1	PUMP BODY	Cast iron complete with threaded ports in compliance with ISO 228/1				
2	BODY BACKPLATE	Stainless steel AISI 304				
3	NOZZLE ASSEMBLY	Noryl FE1520PW				
4	IMPELLER	Stainless steel AISI 304				
5	MOTOR SHAFT	Stainless steel EN 10088-3 - 1.4104				
6	MECHANICAL SEAL	Seal Model	Shaft Diameter	Stationary ring	Materials Rotational ring	Elastomer
		AR-14	Ø 14 mm	Ceramic	Graphite	NBR
7	BEARINGS	6203 ZZ / 6203 ZZ				
8	CAPACITOR	Pump Single-phase	Capacitance (220 V)	(110 V or 127 V)		
		JSWm 2C	20 µF - 450 VL	60 µF - 300 VL		
		JSWm 2B	25 µF - 450 VL	60 µF - 300 VL		
		JSWm 2A	25 µF - 450 VL	60 µF - 300 VL		
9	ELECTRIC MOTOR	JSWm: single-phase 220 V - 60 Hz with thermal overload protector incorporated into the winding. JSW: three-phase 220/380 V - 60 Hz or 220/440 V - 60 Hz. ➡ The three-phase pumps are fitted with high performance motors in class IE2 (IEC 60034-30) – Insulation: class F – Protection: IP X4				

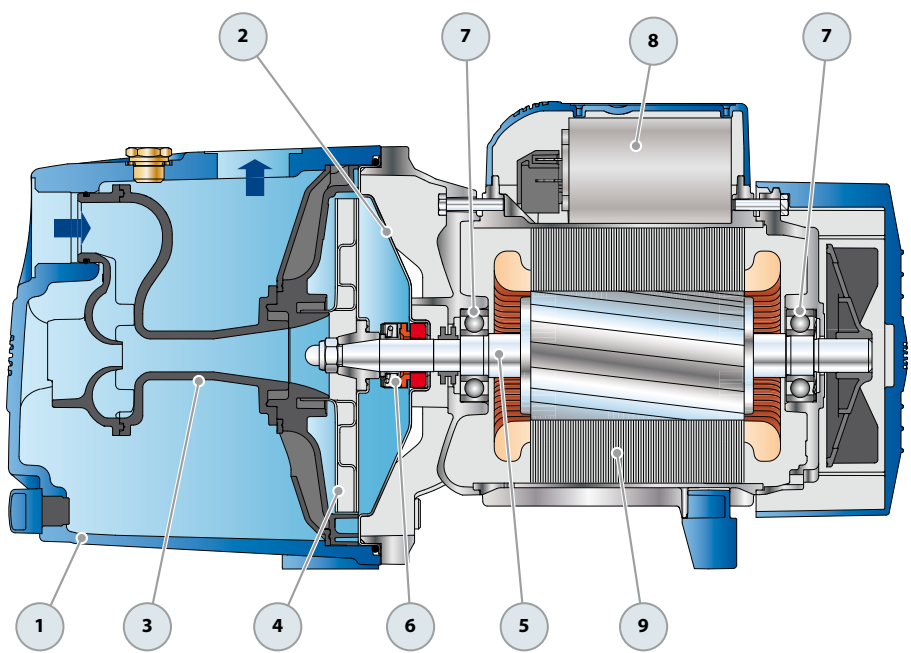

DIMENSIONS AND WEIGHT

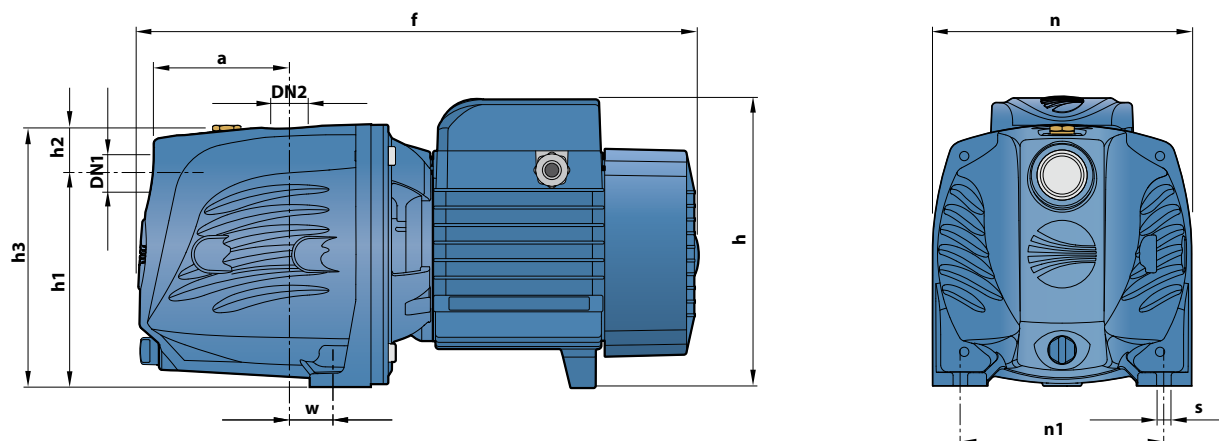

MODEL		PORTS		DIMENSIONS mm										kg	
Single-phase	Three-phase	DN1	DN2	a	f	h	h1	h2	h3	n	n1	w	s	1~	3~
JSWm 2C	JSW 2C	1"	1"	96	388	201 *	147	33	180	180	142	22	10	13.0	13.0
JSWm 2B	JSW 2B													14.0	14.0
JSWm 2A	JSW 2A													14.2	14.2

(*) h=220 mm for single phase versions at 110V or 127 V

ABSORPTION

MODEL	VOLTAGE		
Single-phase	220 V	110 V	127 V
JSWm 2C	5.0 A	10.0 A	9.0 A
JSWm 2B	6.7 A	13.4 A	12.2 A
JSWm 2A	6.9 A	13.8 A	12.9 A

MODEL	VOLTAGE			
Three-phase	220 V	380 V	220 V	440 V
JSW 2C	3.8 A	2.2 A	3.6 A	2.0 A
JSW 2B	5.3 A	3.0 A	5.0 A	2.8 A
JSW 2A	5.8 A	3.3 A	5.5 A	3.1 A

PALLETIZATION

MODEL		GROUPAGE	CONTAINER
Single-phase	Three-phase	n. pumps	n. pumps
JSWm 2C	JSW 2C	72	96
JSWm 2B	JSW 2B	72	96
JSWm 2A	JSW 2A	72	96