

Series V2001 Valves

Type 3531 Globe Valve for Heat Transfer Oil with pneumatic or electric actuator

DIN version

SAMSON

Application

Control valves for heat transfer applications using organic media according to DIN 4754

Nominal size	DN 15 to 80
Nominal pressure	PN 25
Temperature range	-10 to +350 °C



The Type 3531 Globe Valve for Heat Transfer Oil can be equipped with either pneumatic or electric actuators:

- Electropneumatic actuator with integrated i/p positioner for Type 3531-IP
- Pneumatic actuators for Type 3531-PP
- Electric actuators for Type 3531-E1 or Type 3531-E3

Valve body materials

- Spheroidal graphite iron, cast steel or stainless steel for PN 25
- Nominal sizes DN 15 to 80
- Stem sealing with metal bellows and additional packing
- Metal-seated valve plug

The control valves can be optionally equipped with positioners, limit switches and resistance transmitters.

Versions

with Type 3531 Globe Valve for Heat Transfer Oil

- **Type 3531-IP Electropneumatic Globe Valve for Heat Transfer Oil** with Type 3372 Electropneumatic Actuator (Fig. 1) · Plug connector, tight-closing function for completely venting or filling the actuator with air, reference variable 4 to 20 mA, max. 6 bar supply air, fail-safe position fail-close or fail-open, optionally with Type 4744-2 Limit Switch
- **Type 3531-PP Pneumatic Globe Valve for Heat Transfer Oil** with Type 3371 Pneumatic Actuator (Fig. 2), bench range 2.1 to 3.3 bar for fail-close version or 0.4 to 1.4 bar for fail-open version, optionally with Type 4744-2 Limit Switch
- **Type 3531-E1 Electric Globe Valve for Heat Transfer Oil** (Fig. 3) in DN 15 to 50 with Type 5824-30 Electric Actuator, power supply 230 V/50 Hz or 230 V/60 Hz, 110 V/60 Hz and 24 V/50 Hz, optionally with limit contacts, resistance transmitters, positioner



Fig. 1: Type 3531-IP



Fig. 2: Type 3531-PP



Fig. 3: Type 3531-E1



Fig. 4: Electric actuator for Type 3531-E3

- **Type 3531-E3 Electric Globe Valve for Heat Transfer Oil** with Type 3374 Electric Actuator (Fig. 4), power supply 230 V/50 Hz or 230 V/60 Hz, 120 V/60 Hz and 24 V/50 Hz or 24 V/60 Hz, optionally with fail-safe action (typetested), limit contacts, resistance transmitters, positioner

Further versions

- **Type 3531** · Temperature range down to $-70\text{ }^{\circ}\text{C}$ · On request
- **Explosion-protected** version with electric actuators · On request
- **Type 3531 according to ANSI standards** · See Data Sheet
▶ T 8132

Principle of operation

The process medium flows through the valve in the direction indicated by the arrow in the flow-to-open direction (Fig. 5 and Fig. 6). The valve plug position determines the cross-sectional area between the seat and plug. The plug stem is connected to the actuator stem by the stem connector and sealed by a metal bellows.

Fail-safe position with pneumatic actuators

Depending on how the springs are arranged in the electro-pneumatic, pneumatic or electric actuator, the control valve has two different fail-safe positions that become effective when the supply air or control signal fails:

- **Actuator stem extends (fail-close):** The valve closes when the supply air fails.
- **Actuator stem retracts (fail-open):** The valve opens when the supply air fails.

Associated documentation

Instructions on how to mount the valve on the actuator can be found in the mounting and operating instructions delivered with the product:

- ▶ EB 8111 Type 3531 Globe Valve
- ▶ EB 8313-1 Actuator for Type 3531-IP
- ▶ EB 8313-3
- ▶ EB 5824-1 Electric actuator for Type 3531-E1
- ▶ EB 8331-3 Electric actuator for Type 3531-E3

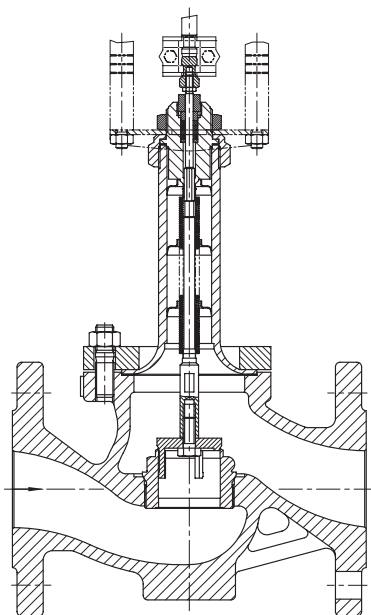


Fig. 5: Type 3531-IP Globe Valve for Heat Transfer Oil in DN 15 to 50

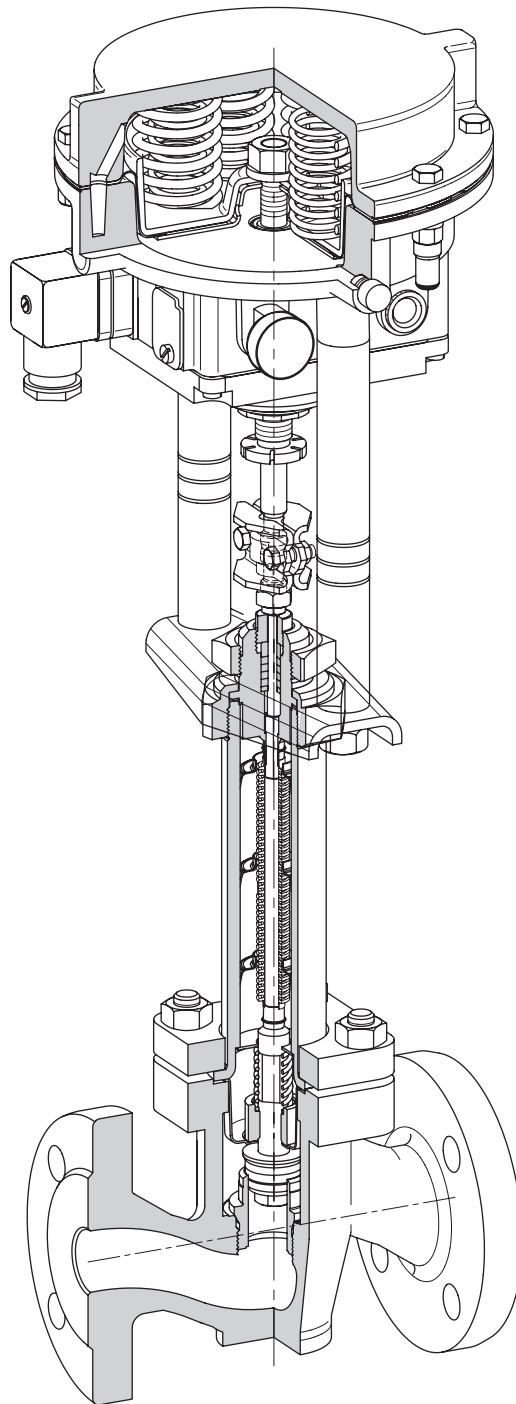


Fig. 6: Type 3531-IP Globe Valve for Heat Transfer Oil, actuator with integrated electropneumatic positioner

Table 1: Type 3531 Globe Valve for Heat Transfer Oil**Table 1.1:** Technical data

Nominal size	DN	15 · 20 · 25 · 32 · 40 · 50 · 65 · 80		
Material		Spheroidal graphite iron EN-JS1049	Cast steel · 1.0619	Stainless steel · 1.4408
Connection	Flanges	EN 1092-1 Form B1, Ra 3.2 to 12.5 µm · EN 1092-1, groove Form D		
Nominal pressure	PN	25		
Seat-plug seal		Metal seal		
Characteristic		Equal percentage		
Rangeability		50:1		
Temperature range		-10 to +350 °C · Extended temperature range lower than -70 °C on request		
Leakage class according to IEC 1349		Metal seal: Class IV Type 3531-E1: Class I (≤0.05 % of K _{VS} coefficient)		
Compliance		 · 		

Table 1.2: Materials · (previous material designation written in parentheses)

Valve size	DN	15 · 20 · 25 · 32 · 40 · 50 · 65 · 80		
Valve body		Spheroidal graphite iron EN-JS1049 (0.7043)	Cast steel · 1.0619	Stainless steel · 1.4408
Valve bonnet		Cast steel S235JR (St 37)		1.4408
Seat and plug	Seat	Up to DN 25: 1.4305 · DN 32 to 50: 1.4104 · DN 65 and 80: 1.4006		
	Plug	1.4305		
Bellows seal		1.4541 · 1.4301		
Packing		PTFE		
Body gasket		Graphite on metal core		

Table 1.3: Nominal sizes, K_{VS} coefficients, seat diameters and travel

Valve size	DN	15		20		25		32	40	50	65	80
K _{VS} coefficient		1.6	4	2.5	6.3	4	10	16	25	35	50	80
Seat Ø	mm	9.5	19	14	22	19	24	32	32	40	65	
Rated travel	mm	15										

Table 1.4: K_{VS} coefficients and associated nominal sizes

K _{VS}	1.6	2.5	4	6.3	10	16	25	35	50	80
DN										
15	•		•							
20		•		•						
25			•		•					
32						•				
40							•			
50								•		
65									•	
80										•

Table 2: *Pneumatic actuators***Table 2.1:** *Technical data*

Actuator		Electropneumatic actuator for Type 3531-IP	Pneumatic actuator for Type 3531-PP
Actuator area		120 cm²	120 cm²
Fail-safe action		Fail-close or fail-open	
Reference variable/ bench range with fail-safe action	CLOSED	4 to 20 mA · Minimum current 3.6 mA Load impedance <6 V (300 Ω/20 mA) Operating direction increasing/increasing >>, fixed	2.1 to 3.3 bar
	OPEN		0.4 to 1.4 bar
Characteristic		Linear · Deviation from terminal-based conformity ≤2 %	-
Hysteresis		≤1 %	
Variable position		≤7 %	
Transit time for rated travel p _{perm} = 4 bar		Approx. 3 s	
Air consumption in steady state		≤160 l _n /h at p _{perm} = 4 bar ≤200 l _n /h at p _{perm} = 6 bar	-
Degree of protection		IP 54 ²⁾	-
Permissible ambient temperature		-30 to +70 °C	-35 to +90 °C
Additional electrical equipment		1 or 2 changeover contacts (IP 65, Ex d, 3 m cable) Nominal voltage/current: 250 V~/5 A~ or 250 V~/0.4 A~	

Table 2.2: *Materials*

Actuator housing		GD-Al Si 12		
Diaphragm		NBR		
Actuator stem		1.4305		
Positioner housing		POM-GF	–	Polyamide
Yoke	Rod	9SMn28K zinc-coated, matt black finish		–
	Bracket	1.4301		

Table 2.3: *Permissible differential pressures*

Fail-safe action		Fail-close		Fail-open	
Bench range	bar	1.4 to 2.3	2.1 to 3.3	1.4 to 2.3	0.4 to 1.4
Min./max. supply pressure	bar	2.8 to 4.0	3.7 to 6.0	3.7 to 4.0	3.5 to 6.0
K_{VS} coefficients		Δp when $p_2 = 0 \text{ bar}$			
1.6 to 10		16	–	16	–
16 to 35		10	–	10	–
50 and 80		3.5	5.0	3.5	5.0

Table 3: *Electric actuators***Table 3.1:** *Technical data*

Actuator	For	Type 3531-E1	Type 3531-E3	
Thrust		0.7 kN	2.5 kN (Type 3374-11)	2.0 kN (Type 3374-21/31) ¹⁾
Transit time for rated travel		90 s	120 s · Shorter transit times on request	
Power supply	230 V/50 Hz	•	•	
	230 V/60 Hz	Special version	•	
	120 V/60 Hz	•	•	
	24 V/50 Hz	•	•	
	24 V/60 Hz	–	•	
Power consumption	Motor	3 VA	7.5 VA	10.5 VA
	With positioner	–	9.5 VA	12.5 VA
Manual override		•	•	
Degree of protection		IP 54 when installed upright	IP 54 · IP 65 with cable gland	
Mounting position		Suspended mounting not permitted (see ► EB 5824-1 and ► EB 8331-3)		
Permissible ambient temperature		0 to 50 °C	5 to 60 °C	
Additional electrical equipment				
Limit contact		2	2	
Resistance transmitters (not for version with positioner)		1 0 to 1000 Ω	2 0 to 1000 Ω	
Positioner		Digital ²⁾	Digital	
Input signal		0/4 to 20 mA · 0/2 to 10 V		
Output signal		0/2 to 10 V		

¹⁾ Actuators with fail-safe action: Type 3374-21 with stem extends, Type 3374-31 with stem retracts

²⁾ Power supply for version with positioner: 24 V DC, 24 V/50 and 60 Hz as well as 85 to 264 V/50 and 60 Hz

Table 3.2: *Permissible differential pressures for metal-seated plug · All pressures in bar*

Actuator	For	Type 3531-E1	Type 3531-E3
Thrust		0.7 kN	2.5 kN
K _{VS} coefficients		Δp when p ₂ = 0 bar	
1.6 to 10		10	16
16 to 35		3.5	12
50 and 80		–	4

Table 4: Dimensions in mm and weights in kg · Type 3531 Globe Valve**Table 4.1:** Type 3531-IP Electropneumatic Control Valve · Dimensions for fail-open or fail-close version

Nominal size	DN	15	20	25	32	40	50	65	80
L (face-to-face dimension)	mm	130	150	160	180	200	230	290	310
Height									
H1 (fail-close)	mm	471			481			586	
H1 (fail-open)	mm	556			566			671	
H2	mm	40			72			98	
H3 (fail-close)	mm	110			110			110	
H3 (fail-open)	mm	210			210			210	
Weight	kg	7.7	8.7	10	14.7	15.3	18.2	25.7	34.5

Table 4.2: Type 3531-PP Pneumatic Control Valve · Dimensions apply to both fail-safe positions

Nominal size	DN	15	20	25	32	40	50	65	80
L (face-to-face dimension)	mm	130	150	160	180	200	230	290	310
Height									
H1 (fail-close or fail-open)	mm	471			481			586	
H2	mm	40			72			98	
H3 (minimum distance)	mm	110			110			110	
Weight	kg	7.3	8.3	9.6	14.3	14.9	17.8	25.3	31.1

Table 4.3: Type 3531-E1 Electric Control Valve


Nominal size	DN	15	20	25	32	40	50	65	80
L (face-to-face dimension)	mm	130	150	160	180	200	230	–	
Height									
H1	mm	429			439			–	
H2	mm	40			72				
H3 (minimum distance)	mm	110			110				
Weight	kg	5.8	6.8	8.1	12.8	13.4	16.3		

Table 4.4: Type 3531-E3 Electric Control Valve


Nominal size	DN	15	20	25	32	40	50	65	80
L (face-to-face dimension)	mm	130	150	160	180	200	230	290	310
Height									
H1	mm	529			539			644	
H2	mm	40			72			98	
H3 ¹⁾ (minimum distance)	mm	110			110			110	
Weight	kg	9.5	10.5	11.8	16.5	17.1	20	27.5	36.3

¹⁾ Cover screws are mounted from the top.


Dimensional drawings

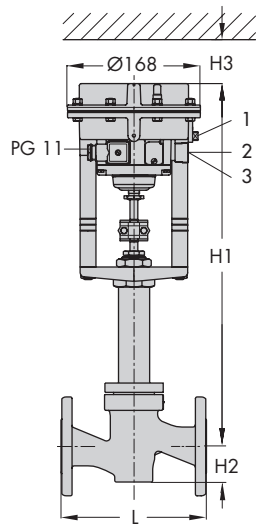

Type 3531-IP, fail-close

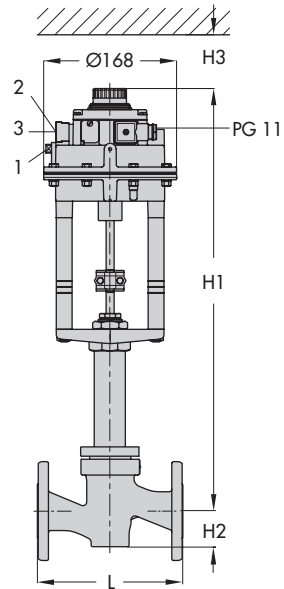


Type 3531-IP, fail-open

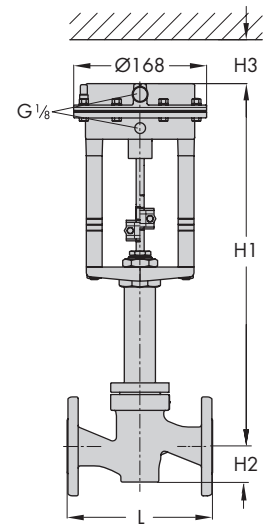


Type 3531-PP


- 1 Pressure gauge G $\frac{1}{8}$
- 2 Supply air G $\frac{1}{4}$
- 3 Vent plug G $\frac{1}{4}$

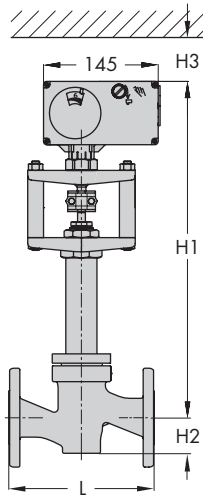

Type 3531-E1

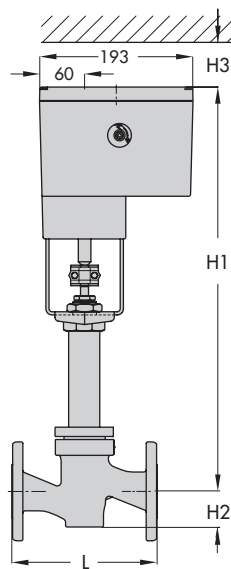

Type 3531-E3

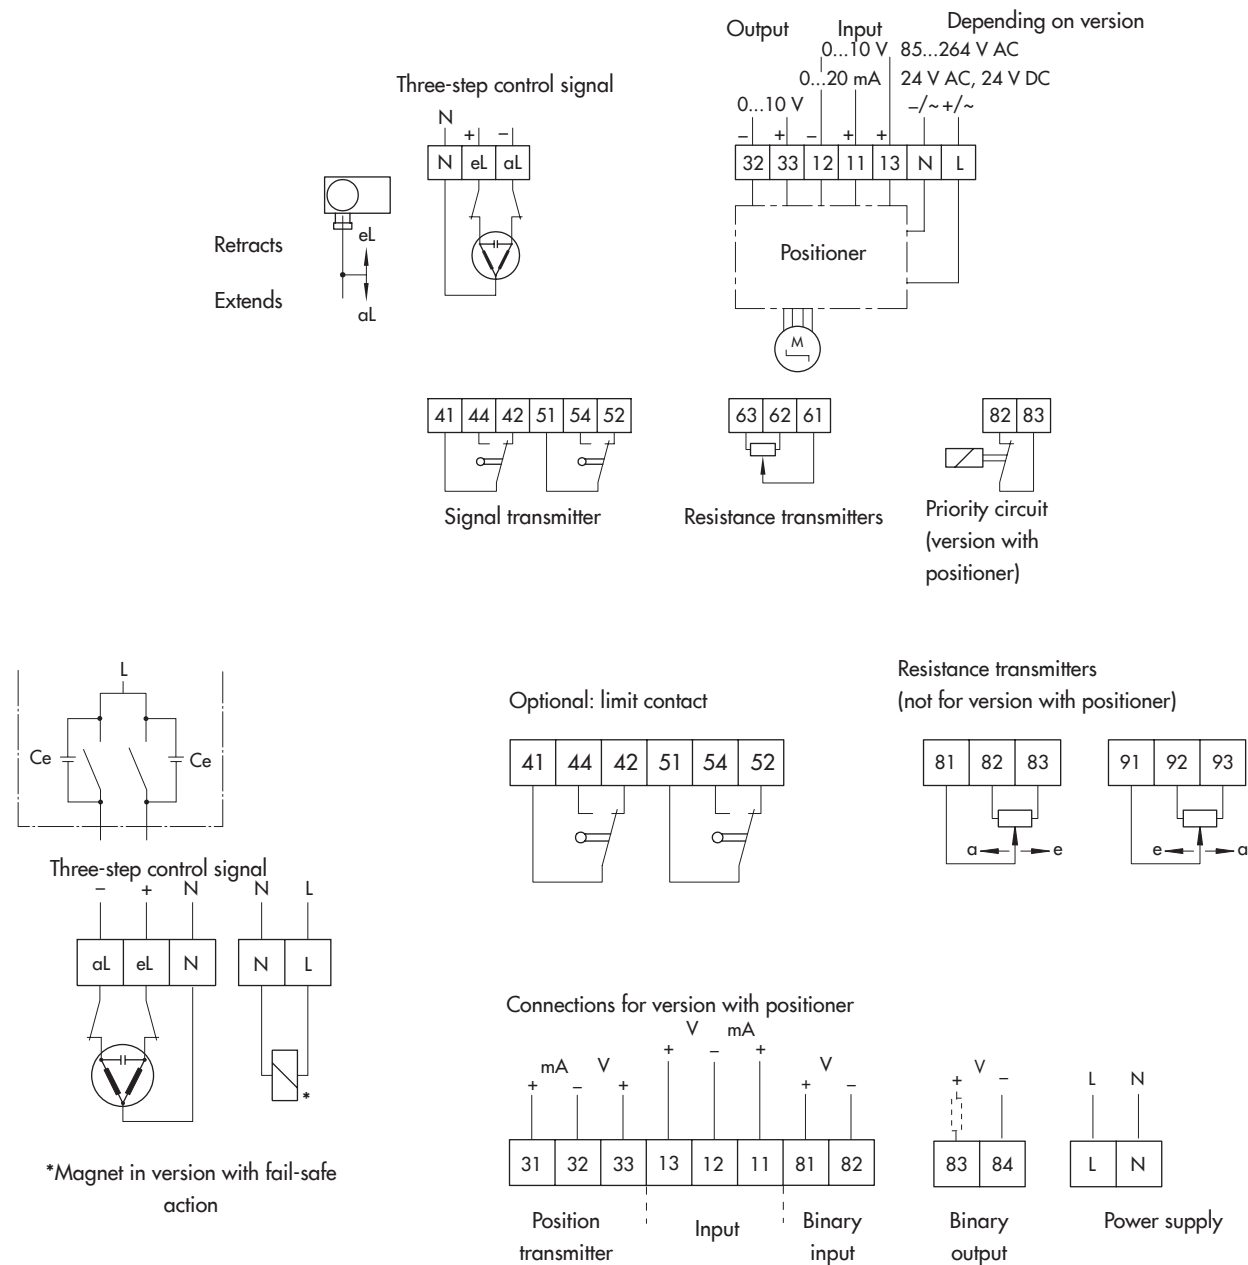

Ordering text

The following specifications are required on ordering:

Type 3531 Globe Valve

Valve size	DN ...
Flow coefficient	K _{VS} ...
Nominal pressure	PN ...
Body material	Spheroidal graphite iron, cast steel or stainless steel
Seat-plug seal	Metal seal

Actuators

For **Type 3531-IP**: Electropneumatic actuator with integrated positioner, 4 to 20 mA

Optional Intrinsically safe Ⓢ II 2G Ex ia IIC T6
according to ATEX

Additional equipment 1 or 2 limit switches

for **Type 3531-PP**: Pneumatic actuator

Fail-safe action Fail-close or fail-open
Bench range Fail-close: 2.1 to 3.3 bar
Fail-open: 0.4 to 1.4 bar

Additional equipment 1 or 2 limit switches

For **Type 3531-E1**: Electric actuator

Voltage supply

- Three-step version – 230 V/50 Hz
- 230 V/60 Hz
- 120 V/60 Hz
- 24 V/50 Hz
- Version with – 24 V DC
- positioner – 24 V/50 and 60 Hz
- 85 to 264 V/50 and 60 Hz

Additional equipment – Two limit contacts

 – Resistance transmitter
 0 to 1000 Ω

 – Positioner
 input
 0/4 to 20 mA or 0/2 to 10 V

For **Type 3531-E3**: Electric actuator

Fail-safe action Fail-close or fail-open
Thrust With fail-safe action: 2 kN
Without fail-safe action: 2.5 kN

Power supply – 230 V/50 Hz

 – 230 V/60 Hz

 – 120 V/60 Hz

 – 24 V/50 Hz

 – 24 V/60 Hz

Additional equipment – Two limit contacts

 – Resistance transmitter
 0 to 1000 Ω

 – Digital positioner with input and
 output 0/4 to 20 mA or 0/2 to
 10 V

Specifications subject to change without notice



SAMSON AG · MESS- UND REGELTECHNIK
Weismüllerstraße 3 · 60314 Frankfurt am Main, Germany
Phone: +49 69 4009-0 · Fax: +49 69 4009-1507
samson@samson.de · www.samson.de

T 8131 EN

2015-06-10 · English