

02 Centrifugal Pumps


CIRCULATION PUMPS



COMMERCIAL CIRCULATION PUMP 59510 SERIES




FOR INTERNATIONAL & US MARKETS

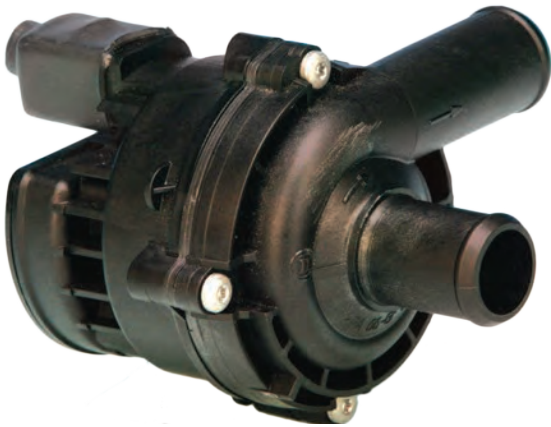

APPLICATIONS

- 12.5 liters/min (3.3GPM) @ 0.12 Bar (1.74PSI)
- Magnetic Drive - sealed pump chamber
- Ignition protected
- Meets EMC requirements
- Connections for 19mm (3/4") ID Hose
- Continuously rated
- Pumps water at 212°F (100°C)
- Long life brushless DC motor

PERFORMANCE

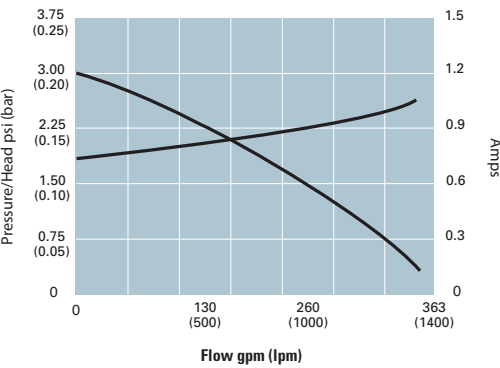


MODELS

MODEL #S	CERTIFICATION	VOLTAGE	FUSE SIZE	CURRENT DRAW	CABLE LENGTH	MINIMUM WIRE SIZE	
59510-0012	CE	12VDC	2A	1.2A	0 - 8 m (0 - 27 ft), 8 - 15 m (27 - 50 ft)	.1 in ² (2.5 mm ²) .16in ² (4.0 mm ²)	AWG 12 AWG 10

DIMENSIONAL DRAWINGS

Unless otherwise stated dimensions in [] are in mm.

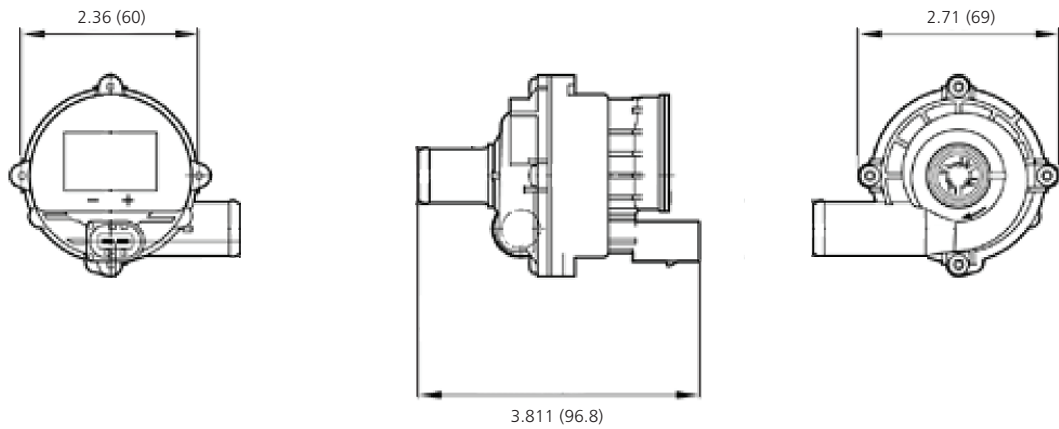


FOR INTERNATIONAL & US MARKETS



APPLICATIONS

- Up to 5.5 gpm (21 LPM) @ 1.45 psi (0.10 bar)
- Variable flow - 5 speed control
- Ignition protected
- Meets EMC requirements
- Connections for 1/2" (12.7mm) BSP
- Continuously rated
- Pumps water at 176°F (80°C)
- Handles aggressive liquids
- Long life brushless DC motor

PERFORMANCE

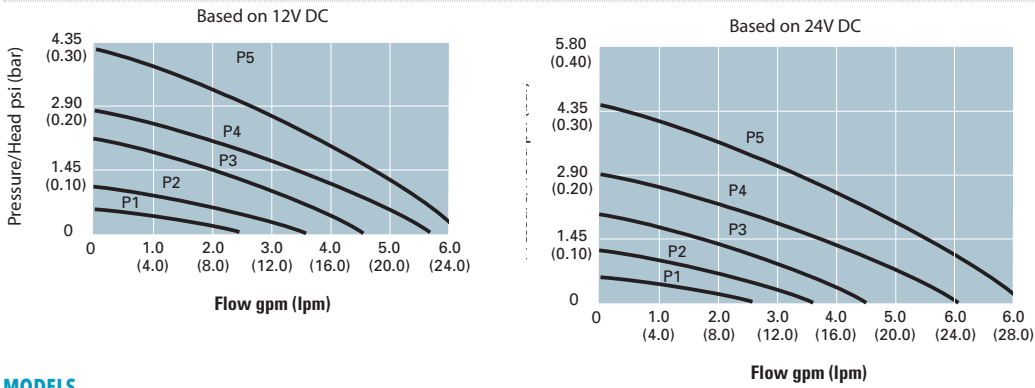

MODELS

MODEL #S	CERTIFICATION	VOLTAGE	FUSE SIZE	CURRENT DRAW	CABLE LENGTH	MINIMUM WIRE SIZE	
59520-0000	CE	8-24VDC	2.5A	1.8A	27 - 50ft (8 - 15m) , 0 - 27 ft (0 - 8m)	.1 in ² (2.5 mm ²) .16in ² (4.0 mm ²)	AWG 12 AWG 10

*Max Voltage 25V

DIMENSIONAL DRAWINGS

Unless otherwise stated dimensions in [] are in mm.

