

02 Centrifugal Pumps

CIRCULATION PUMPS



COMMERCIAL CIRCULATION PUMP 59530 SERIES





FOR INTERNATIONAL & US MARKETS



APPLICATIONS

- Up to 5.5 gpm (21 LPM) @ 1.45 psi (0.10 bar)
- Variable flow - 5 speed control
- Ignition protected
- Meets EMC requirements
- Connections for 3/4" (19mm) BSP
- Continuously rated
- Pumps water at 176°F (80°C)
- Long life brushless DC motor

PERFORMANCE

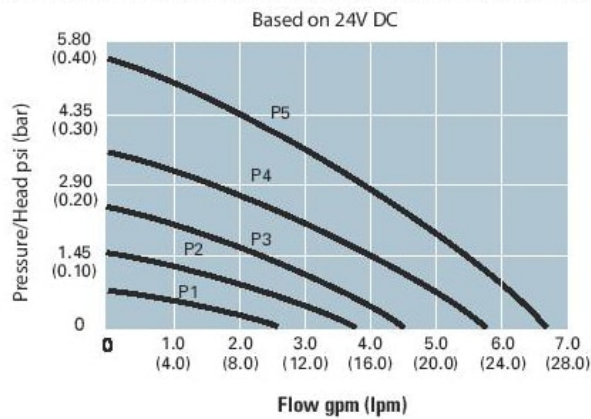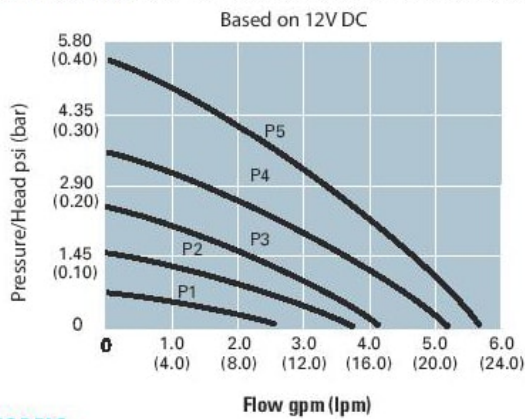

MODELS

MODEL #5	CERTIFICATION	VOLTAGE	FUSE SIZE	CURRENT DRAW	CABLE LENGTH	MINIMUM WIRE SIZE
59530-0000	CE	8-24VDC*	2.5A	1.8A	8 - 15 m (27 - 50 ft), 0 - 8 m (0 - 27 ft)	.1 in ² (2.5 mm ²) .16in ² (4.0 mm ²) AWG 12 AWG 10

*Max Voltage 25V

DIMENSIONAL DRAWINGS

Unless otherwise stated dimensions in [] are in mm.

